
10000 r/min



2209 EKTN9 SKF

Self-aligning ball bearings

TYPE: Ball bearings, Radial ball bearings, Double row, spherical, With tapered bore, With adapter sleeve

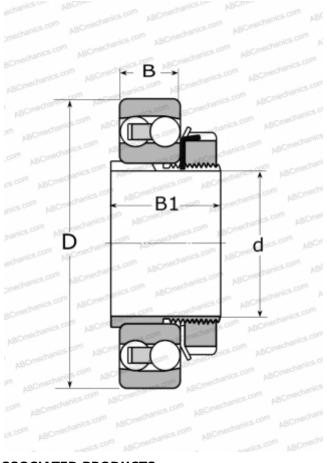

Technical specification

DIMENSIONS, MM

Limiting speed

d40,000D85,000B23,000B139,000WEIGHT, KG0,780MANUFACTURERSKFCALCULATION DATASKFBasic dynamic load rating, C32,500 kNBasic static load rating, Co10,600 kNFatigue load limit, Pu0,540 kNReference speed15000 r/min
B23,000B139,000WEIGHT, KG0,780MANUFACTURERSKFCALCULATION DATASKFBasic dynamic load rating, C32,500 kNBasic static load rating, Co10,600 kNFatigue load limit, Pu0,540 kN
B139,000WEIGHT, KG0,780MANUFACTURERSKFCALCULATION DATASKFBasic dynamic load rating, C32,500 kNBasic static load rating, Co10,600 kNFatigue load limit, Pu0,540 kN
WEIGHT, KG0,780MANUFACTURERSKFCALCULATION DATASKFBasic dynamic load rating, C32,500 kNBasic static load rating, Co10,600 kNFatigue load limit, Pu0,540 kN
MANUFACTURERSKFCALCULATION DATABasic dynamic load rating, C32,500 kNBasic static load rating, Co10,600 kNFatigue load limit, Pu0,540 kN
CALCULATION DATABasic dynamic load rating, C32,500 kNBasic static load rating, Co10,600 kNFatigue load limit, Pu0,540 kN
Basic dynamic load rating, C32,500 kNBasic static load rating, Co10,600 kNFatigue load limit, Pu0,540 kN
Basic static load rating, Co10,600 kNFatigue load limit, Pu0,540 kN
Fatigue load limit, Pu0,540 kN
Reference speed 15000 r/min

ASSOCIATED PRODUCTS H 309

