


53308+U 308 SKF

Thrust ball bearings

TYPE: Ball bearings, Thrust ball bearing, Single direction, With spherical housing locating washer and seating washer, separable

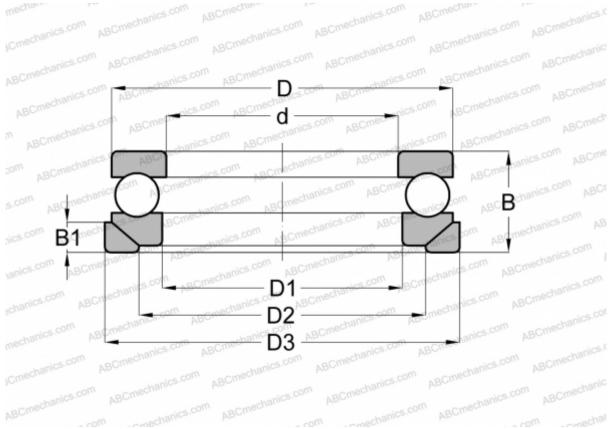

Technical specification

DIMENSIONS, MM	
d	40,000
D	78,000
D1	42,000
D2	60,000
D3	82,000
В	31,000
B1	8,500
WEIGHT, KG	0,670
MANUFACTURER	<u>SKF</u>
INTERCHANGE	
ABC	<u>53308+U308</u>
FAG	53308+U308
RIV	<u>MR 40</u>
INCLUDED PRODUCTS	

U 308



INTERCHANGE

INTERCHANGE	
STEYR	<u>53308 U</u>
NSK	<u>53308 U</u>

CALCULATION DATA

Basic dynamic load rating, C	61,800 kN
Basic static load rating, Co	122,000 kN
Fatigue load limit, Pu	4,500 kN
Reference speed	3000 r/min
Limiting speed	4300 r/min