


## 53209+U 209 SKF

Thrust ball bearings

TYPE: Ball bearings, Thrust ball bearing, Single direction, With spherical housing locating washer and seating washer, separable

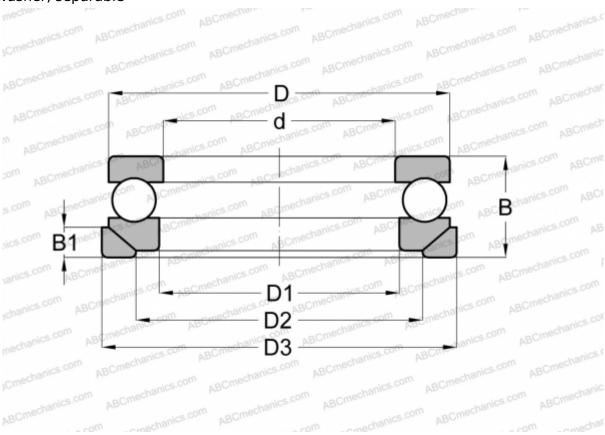

## **Technical specification**

DIMENSIONS, MM						
d	45,000					
D	73,000					
D1	47,000					
D2	60,000					
D3	78,000					
В	24,000					
B1	7,500					
WEIGHT, KG	0,390					
MANUFACTURER	SKF					
INTERCHANGE						
ABC	53209+U209					
FAG	53209+U209					
170	5520510205					

	_		_	_	_		_		_	_
ı		IΤ	_	n	_	ш	^	NI	_	
ı	ı١	4 .	_	ĸ	<b>L</b> .	п	4	IV	L T	

LR 45

STEYR	<u>53209 U</u>						
NSK	<u>53209 U</u>						
CALCULATION DATA							
Basic dynamic load rating, C	39,000 kN						
Basic static load rating, Co	86,500 kN						
Fatigue load limit, Pu	3,200 kN						
Reference speed	3600 r/min						
Limiting speed	5000 r/min						

## **INCLUDED PRODUCTS**

U 209

RIV

