


## 53410+U 410 SKF

Thrust ball bearings

TYPE: Ball bearings, Thrust ball bearing, Single direction, With spherical housing locating washer and seating washer, separable

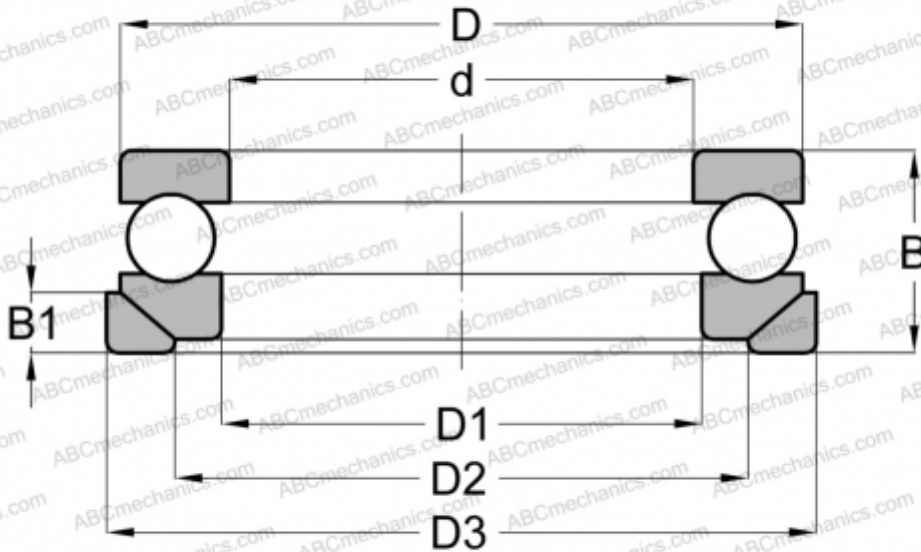

### Technical specification

#### DIMENSIONS, MM

|    |         |
|----|---------|
| d  | 50,000  |
| D  | 110,000 |
| D1 | 52,000  |
| D2 | 80,000  |
| D3 | 115,000 |
| B  | 50,000  |
| B1 | 14,000  |

**WEIGHT, KG** 2,310

**MANUFACTURER** [SKF](#)

#### INTERCHANGE

|       |                            |
|-------|----------------------------|
| ABC   | <a href="#">53410+U410</a> |
| RIV   | <a href="#">PR-50</a>      |
| STEYR | <a href="#">53410 U</a>    |

#### INCLUDED PRODUCTS

U 410

#### INTERCHANGE

NSK [53410 U](#)

#### CALCULATION DATA

|                              |            |
|------------------------------|------------|
| Basic dynamic load rating, C | 159,000 kN |
| Basic static load rating, Co | 340,000 kN |
| Fatigue load limit, Pu       | 12,500 kN  |
| Reference speed              | 2000 r/min |
| Limiting speed               | 2800 r/min |