


53317+U 317 SKF

Thrust ball bearings

TYPE: Ball bearings, Thrust ball bearing, Single direction, With spherical housing locating washer and seating washer, separable

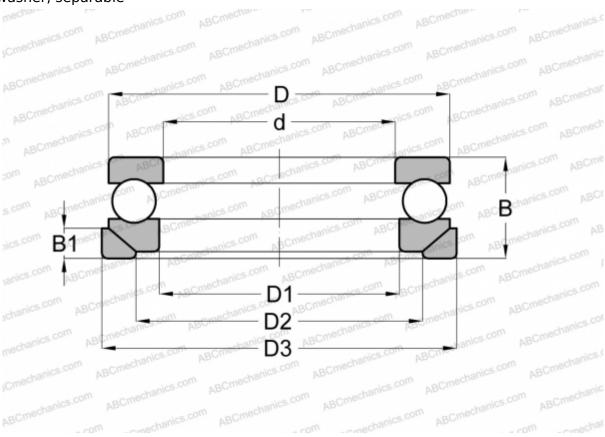

Technical specification

| DIMENSIONS, MM | | | | | | |
|------------------|---------|--|--|--|--|--|
| d | 85,000 | | | | | |
| D | 150,000 | | | | | |
| D1 | 88,000 | | | | | |
| D2 | 115,000 | | | | | |
| D3 | 155,000 | | | | | |
| В | 58,000 | | | | | |
| B1 | 17,500 | | | | | |
| WEIGHT, KG | 4,350 | | | | | |
| MANUFACTURER SKF | | | | | | |
| INTERCUANCE | | | | | | |

| ı | N | TE | R | C | H/ | 41 | 10 | GE | • |
|---|---|----|---|---|----|----|----|----|---|
|---|---|----|---|---|----|----|----|----|---|

| ABC | <u>53317+U317</u> |
|-----|-------------------|
| FAG | <u>53317+U317</u> |
| RIV | MR 85 |

INCLUDED PRODUCTS

U 317

INTERCHANGE

Limiting speed

STEYR

| NSK | <u>53317 U</u> |
|------------------------------|----------------|
| CALCULATION DATA | |
| Basic dynamic load rating, C | 190,000 kN |
| Basic static load rating, Co | 465,000 kN |
| Fatigue load limit, Pu | 16,000 kN |
| Reference speed | 1600 r/min |

53317 U

2200 r/min

