


52230M SKF

Thrust ball bearings

TYPE: Ball bearings, Thrust ball bearing, Double direction, Separable

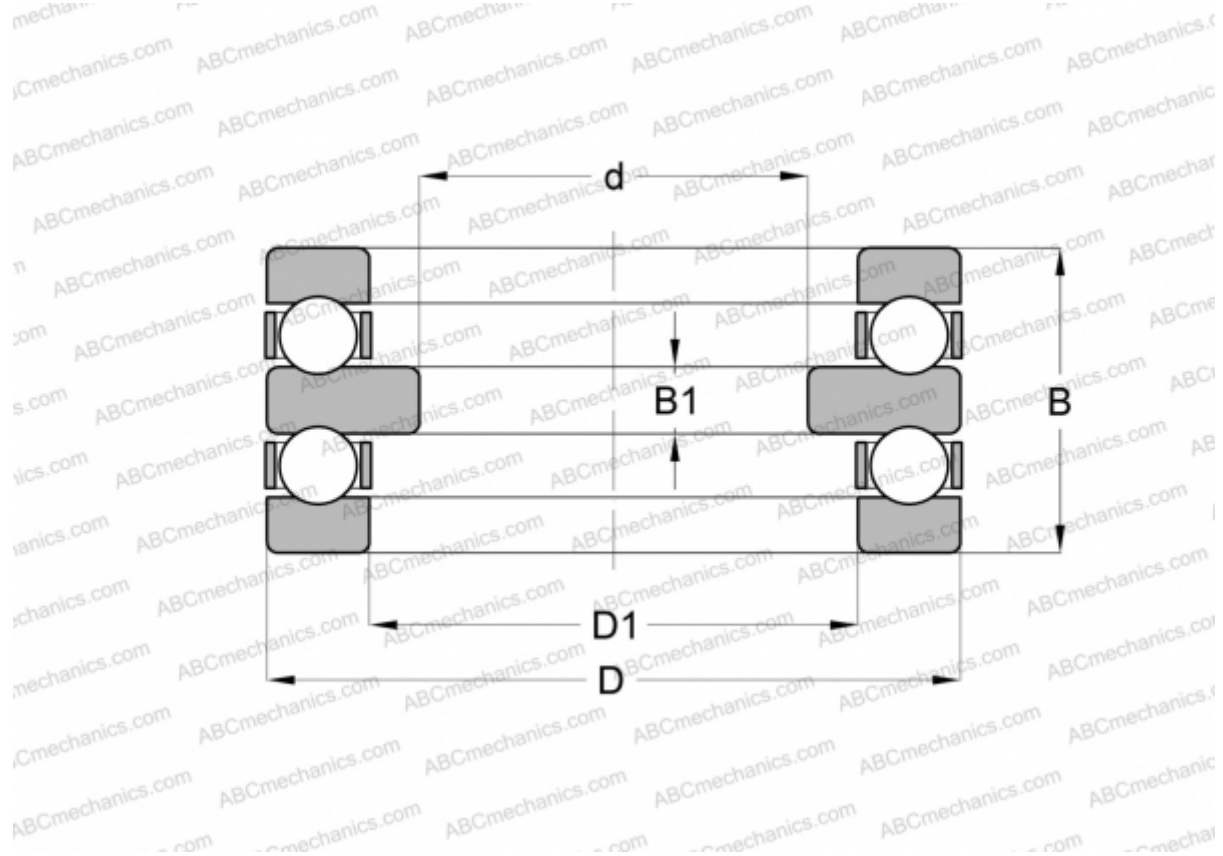

Technical specification

DIMENSIONS, MM

| | |
|------|---------|
| d | 130,000 |
| D | 215,000 |
| $D1$ | 153,000 |
| B | 89,000 |
| $B1$ | 20,000 |

WEIGHT, KG 11,500

MANUFACTURER [SKF](#)

INTERCHANGE

| | |
|-------|-------------------------|
| ABC | 52230 |
| FAG | 52230 |
| RIV | DLP 150 |
| STEYR | 52230 |

CALCULATION DATA

| | |
|---------------------------------|------------|
| Basic dynamic load rating, C | 238,000 kN |
| Basic static load rating, C_0 | 800,000 kN |
| Fatigue load limit, P_u | 22,000 kN |
| Reference speed | 1300 r/min |
| Limiting speed | 1800 r/min |