


## HK 1516.2RS SKF

Drawn cup needle roller bearings

TYPE: Roller bearings, Needle, Single row, Drawn cup, With cage, lip seals on both side, metric

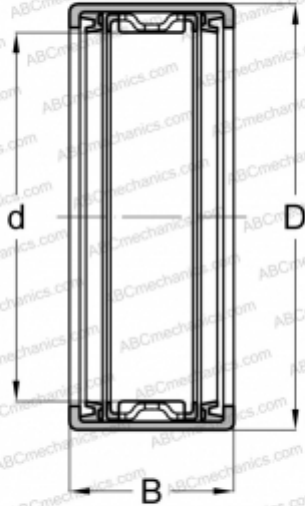

### Technical specification

#### DIMENSIONS, MM

d	15,000
D	21,000
B	16,000

#### WEIGHT, KG

0,015

#### MANUFACTURER

[SKF](#)

#### INTERCHANGE

ABC	<a href="#">HK 1516 2RS</a>
FAG	<a href="#">HK 1516 2RS</a>
INA	<a href="#">HK 1516 2RS</a>
IKO	<a href="#">TLA 1516 UU</a>
TORRINGTON	<a href="#">FJTT-1516</a>

#### CALCULATION DATA

Basic dynamic load rating, C	7,480 kN
Basic static load rating, Co	10,000 kN
Fatigue load limit, Pu	1,140 kN
Limiting speed	9500 r/min

#### REPLACES

RHNA 162216 2RS

#### ASSOCIATED PRODUCTS

LR/IR 12x15x16.5