

BK 1412 SKF

Drawn cup needle roller bearings

TYPE: Roller bearings, Needle, Single row, Drawn cup, Closed end, with cage, metric

Technical specification

DIMENSIONS, MM

| | |
|---|--------|
| d | 14,000 |
| D | 20,000 |
| B | 12,000 |

WEIGHT, KG

0,012

MANUFACTURER


[SKF](#)

INTERCHANGE

| | |
|-----|---------------------------|
| ABC | BK 1412 |
| FAG | BK 1412 |
| INA | BK 1412 |
| IKO | TLAM 1412 |

CALCULATION DATA

| | |
|------------------------------|-------------|
| Basic dynamic load rating, C | 6,820 kN |
| Basic static load rating, Co | 8,650 kN |
| Fatigue load limit, Pu | 0,980 kN |
| Reference speed | 15000 r/min |
| Limiting speed | 17000 r/min |

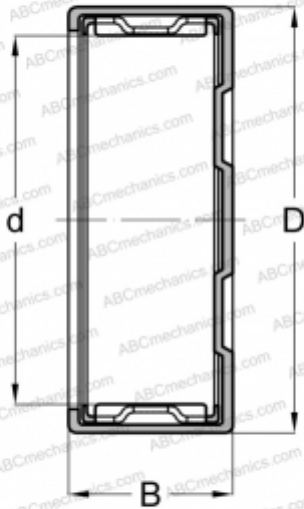

ASSOCIATED PRODUCTS

IR 10x14x13, G/SD 14x20x3