

## BK 2526 SKF

Drawn cup needle roller bearings

TYPE: Roller bearings, Needle, Single row, Drawn cup, Closed end, with cage, metric

### Technical specification

#### DIMENSIONS, MM

|   |        |
|---|--------|
| d | 25,000 |
| D | 32,000 |
| B | 26,000 |

#### WEIGHT, KG

0,048

#### MANUFACTURER

[SKF](#)

#### INTERCHANGE


|     |                           |
|-----|---------------------------|
| ABC | <a href="#">BK 2526</a>   |
| FAG | <a href="#">BK 2526</a>   |
| INA | <a href="#">BK 2526</a>   |
| IKO | <a href="#">TLAM 2526</a> |

#### CALCULATION DATA

|                              |             |
|------------------------------|-------------|
| Basic dynamic load rating, C | 24,200 kN   |
| Basic static load rating, Co | 45,000 kN   |
| Fatigue load limit, Pu       | 5,500 kN    |
| Reference speed              | 9500 r/min  |
| Limiting speed               | 11000 r/min |

#### REPLACES

RBNA 253226

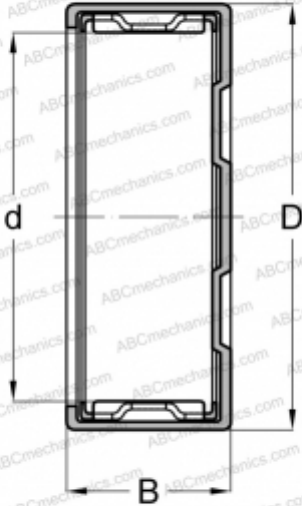

#### ASSOCIATED PRODUCTS

LR/IR 20x25x26.5, G 25x32x4