


CFE 30-2 R IKO

Cam followers

TYPE: Roller bearings, Stud type track rollers, With axial guidance, with eccentric collar, sealing rings on both sides

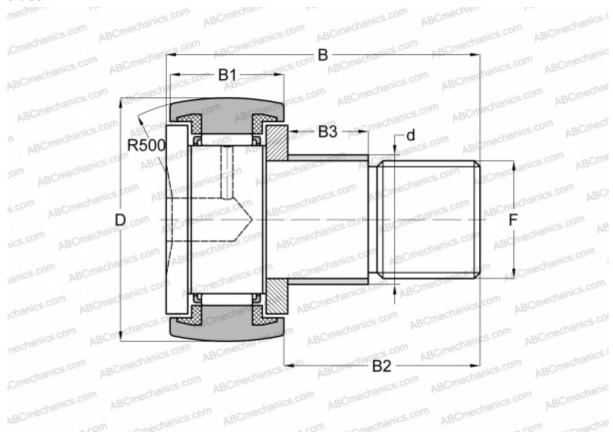

Technical specification

DIMENSIONS, MM

D 90,000 B 100,000 B1 35,000 B2 63,000 F M30x1.5 WEIGHT, KG 2,380	-	
B 100,000 B1 35,000 B2 63,000 F M30x1.5 WEIGHT, KG 2,380 MANUFACTURER	d	41,000
B1 35,000 B2 63,000 F M30x1.5 WEIGHT, KG 2,380 MANUFACTURER IKC	D	90,000
B2 63,000 F M30x1.5 WEIGHT, KG 2,380 MANUFACTURER IKO	В	100,000
WEIGHT, KG 2,380 MANUFACTURER IKO	B1	35,000
WEIGHT, KG 2,380 MANUFACTURER IKO	B2	63,000
MANUFACTURER IKC	F	M30x1.5
	WEIGHT, KG	2,380
CALCIII ATION DATA	MANUFACTURER	<u>IKO</u>
CALCULATION DATA		
Basic dynamic load rating, C 45,400 kM	Basic dynamic load rating, C	45,400 kN
	Basic static load rating, Co	85,100 kN

