


CFE 20 UU IKO

Cam followers

TYPE: Roller bearings, Stud type track rollers, With axial guidance, with eccentric collar, sealing rings on both sides, cylindrical outer ring

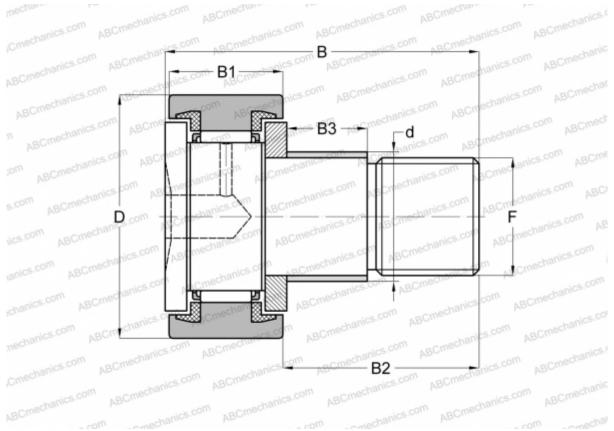

Technical specification

DIMENSIONS, MM

| d | 27,000 |
|------------------------------|------------|
| D | 52,000 |
| В | 66,100 |
| B1 | 24,000 |
| B2 | 40,500 |
| F | M20x1.5 |
| WEIGHT, KG | 0,500 |
| MANUFACTURER | <u>IKO</u> |
| CALCULATION DATA | |
| Basic dynamic load rating, C | 20,700 kN |
| Basic static load rating, Co | 34,600 kN |

