


CFE 30 VR IKO

Cam followers

TYPE: Roller bearings, Stud type track rollers, With axial guidance, eccentric stud, full complement bearing, gap seal on both side

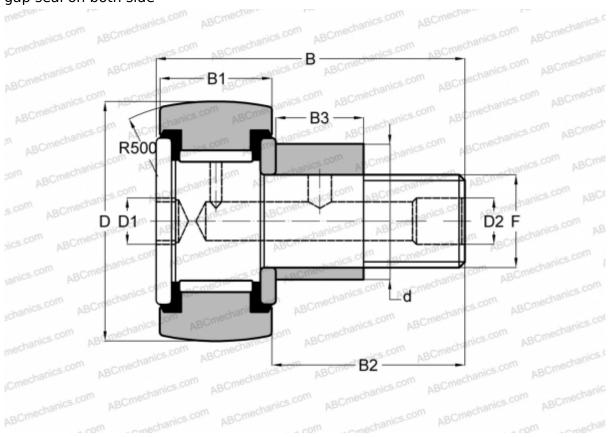

Technical specification

		\sim		ММ
11111	. – N	~ II I	M &	IVI IVI

Dividition of the control of the con	
d	41,000
D	80,000
В	100,000
B1	35,000
B2	63,000
F	M30x1.5
WEIGHT, KG	2,030
MANUFACTURER	<u>IKO</u>
INTERCHANGE	
ABC	CFE 30 VR
CALCULATION DATA	
CALCULATION DATA	
Basic dynamic load rating, C	67,700 kN
-	

144,000 kN



Basic static load rating, Co