


CFE 10 VBUUM IKO

Cam followers

TYPE: Roller bearings, Stud type track rollers, With axial guidance, eccentric stud, full complement bearing, sealing rings on both sides, cylindrical outer ring

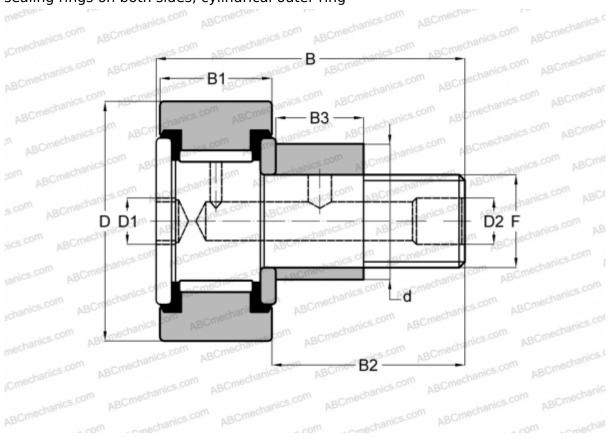

Technical specification

| DIMENSIONS, MM | | CALCULATION DATA | |
|------------------------------|---------------|------------------------------|--------|
| d | 13,000 | Basic static load rating, Co | 14,500 |
| D | 22,000 | | |
| В | 36,200 | | |
| B1 | 12,000 | | |
| B2 | 23,000 | | |
| F | M10x1 | | |
| WEIGHT, KG | 0,051 | | |
| MANUFACTURER | <u>IKO</u> | | |
| INTERCHANGE | | | |
| ABC | CFE 10 VBUUM | | |
| INA | KRVE 22 PPXSK | | |
| CALCULATION DATA | | | |
| Basic dynamic load rating, C | 9,570 kN | | |

