


B7006CTP4S UL FAG

Angular contact ball bearings

TYPE: Ball bearings, Angular contact ball bearing, Precision (spindle), Contact angle 15°, Standard, for mounting in pairs or sets, light preload

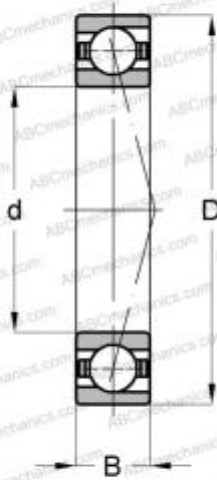

Technical specification

DIMENSIONS, MM

d	30,000
D	55,000
B	13,000

MANUFACTURER

[FAG](#)

INTERCHANGE

ABC	7006 CDGA/P4A
BARDEN	106HC UL
SKF	7006 CDGA/P4A
NSK	7006 CTRSULP3
SNFA	EX30 7CE1 UL

CALCULATION DATA

Basic dynamic load rating, C	15,000 kN
Basic static load rating, Co	10,200 kN
Fatigue load limit, Pu	0,750 kN
Attainable speed for grease lubrication	26000 r/min
Attainable speed for oil-air lubrication	40000 r/min