


XC10M6HC UH BARDEN

Angular contact ball bearings

TYPE: Ball bearings, Angular contact ball bearing, Precision (spindle), Contact angle 15°, Rings made of stainless steel CRONIDUR 30, ceramic balls, heavy preload

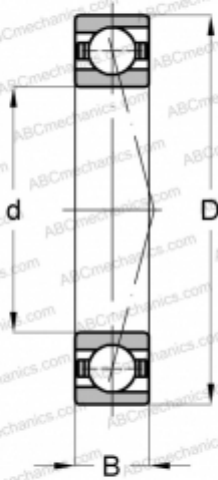

Technical specification

DIMENSIONS, MM

d	6,000
D	17,000
B	6,000

MANUFACTURER

[BARDEN](#)

INTERCHANGE

ABC	XCB706CTP4S UH
FAG	XCB706CTP4S UH

CALCULATION DATA

Basic dynamic load rating, C	3,650 kN
Basic static load rating, Co	0,670 kN
Attainable speed for grease lubrication	160000 r/min
Attainable speed for oil-air lubrication	260000 r/min