


## XCZSB10M8CRR UM BARDEN

Angular contact ball bearings

TYPE: Ball bearings, Angular contact ball bearing, Precision (spindle), Contact angle 15°, Rings made of stainless steel CRONIDUR 30, high speed, ceramic balls, non-contact seal on both side, medium preload

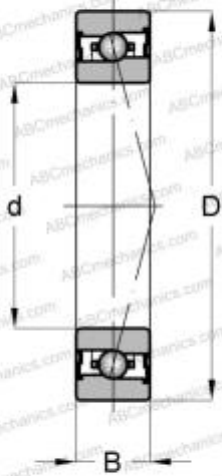

### Technical specification

#### DIMENSIONS, MM

d	8,000
D	22,000
B	7,000

#### MANUFACTURER

[BARDEN](#)

#### INTERCHANGE

ABC	<a href="#">XCS708CTP4S UM</a>
FAG	<a href="#">XCS708CTP4S UM</a>

#### CALCULATION DATA

Basic dynamic load rating, C	2,900 kN
Basic static load rating, Co	0,700 kN
Attainable speed for grease lubrication	140000 r/min
Attainable speed for oil-air lubrication	220000 r/min