


XCZSB10M9CRR UH BARDEN

Angular contact ball bearings

TYPE: Ball bearings, Angular contact ball bearing, Precision (spindle), Contact angle 15°, Rings made of stainless steel CRONIDUR 30, high speed, ceramic balls, non-contact seal on both side, heavy preload

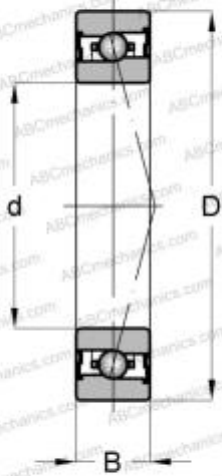

Technical specification

DIMENSIONS, MM

d	9,000
D	24,000
B	7,000

MANUFACTURER

[BARDEN](#)

INTERCHANGE

ABC	XCS709CTP4S UH
FAG	XCS709CTP4S UH

CALCULATION DATA

Basic dynamic load rating, C	4,050 kN
Basic static load rating, Co	1,000 kN
Attainable speed for grease lubrication	130000 r/min
Attainable speed for oil-air lubrication	200000 r/min