


## XCZSB10M9ERR UL BARDEN

Angular contact ball bearings

TYPE: Ball bearings, Angular contact ball bearing, Precision (spindle), Contact angle 25°, Rings made of stainless steel CRONIDUR 30, high speed, ceramic balls, non-contact seal on both side, light preload

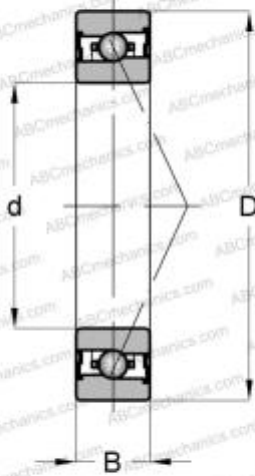

### Technical specification

#### DIMENSIONS, MM

d	9,000
D	24,000
B	7,000

#### MANUFACTURER

[BARDEN](#)

#### INTERCHANGE

ABC	<a href="#">XCS709ETP4S UL</a>
FAG	<a href="#">XCS709ETP4S UL</a>

#### CALCULATION DATA

Basic dynamic load rating, C	3,900 kN
Basic static load rating, Co	0,950 kN
Attainable speed for grease lubrication	110000 r/min
Attainable speed for oil-air lubrication	180000 r/min