


## XCZSB10M7ERR UH BARDEN

Angular contact ball bearings

TYPE: Ball bearings, Angular contact ball bearing, Precision (spindle), Contact angle 25°, Rings made of stainless steel CRONIDUR 30, high speed, ceramic balls, non-contact seal on both side, heavy preload

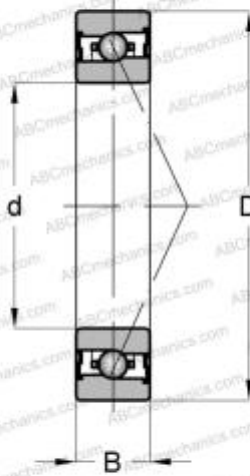

### Technical specification

#### DIMENSIONS, MM

d	7,000
D	19,000
B	6,000

#### MANUFACTURER

[BARDEN](#)

#### INTERCHANGE

ABC	<a href="#">XCS707ETP4S UH</a>
FAG	<a href="#">XCS707ETP4S UH</a>

#### CALCULATION DATA

Basic dynamic load rating, C	2,450 kN
Basic static load rating, Co	0,530 kN
Attainable speed for grease lubrication	140000 r/min
Attainable speed for oil-air lubrication	220000 r/min