


XC1900HERR UL BARDEN

Angular contact ball bearings

TYPE: Ball bearings, Angular contact ball bearing, Precision (spindle), Contact angle 25°, Rings made of stainless steel CRONIDUR 30, ceramic balls, non-contact seal on both side, light preload

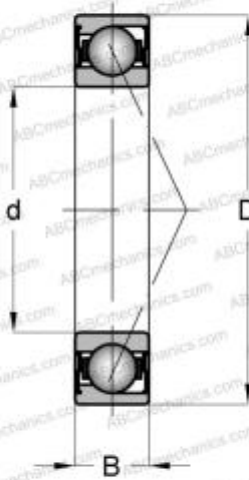

Technical specification

DIMENSIONS, MM

d	10,000
D	22,000
B	6,000

MANUFACTURER

[BARDEN](#)

INTERCHANGE

ABC	XCB71900-E-2RSD-T-P4S-UL
FAG	XCB71900-E-2RSD-T-P4S-UL

CALCULATION DATA

Basic dynamic load rating, C	4,500 kN
Basic static load rating, Co	1,000 kN
Attainable speed for grease lubrication	100000 r/min
Attainable speed for oil-air lubrication	170000 r/min