


XC100HERR UH BARDEN

Angular contact ball bearings

TYPE: Ball bearings, Angular contact ball bearing, Precision (spindle), Contact angle 25°, Rings made of stainless steel CRONIDUR 30, ceramic balls, non-contact seal on both side, heavy preload

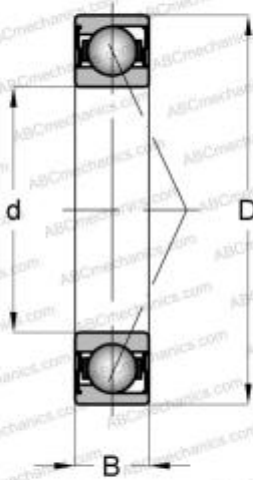

Technical specification

DIMENSIONS, MM

d	10,000
D	26,000
B	8,000

MANUFACTURER

[BARDEN](#)

INTERCHANGE

ABC	XCB7000-E-2RSD-T-P4S-UH
FAG	XCB7000-E-2RSD-T-P4S-UH

CALCULATION DATA

Basic dynamic load rating, C	6,300 kN
Basic static load rating, Co	1,400 kN
Attainable speed for grease lubrication	85000 r/min
Attainable speed for oil-air lubrication	140000 r/min