


30302-A FAG

Tapered roller bearings

TYPE: Roller bearings, Tapered, Single row, Metric

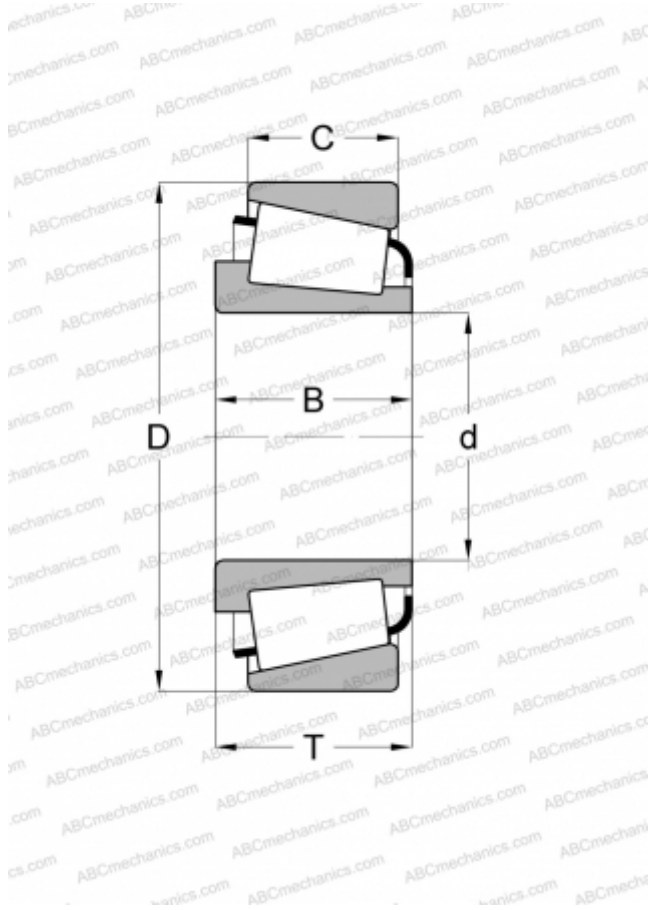

Technical specification

DIMENSIONS, MM

d	15,000
D	42,000
B	13,000
T	14,250
C	11,000

MANUFACTURER

[FAG](#)

INTERCHANGE

ABC	32302
TIMKEN	30302
SKF	30302 J2
RIV	01/02/7502

CALCULATION DATA

Basic dynamic load rating, C	23,000 kN
Basic static load rating, Co	20,500 kN
Fatigue load limit, Pu	2,110 kN
Reference speed	12500 r/min
Limiting speed	21000 r/min