


31307-A-N11CA-A40-70 FAG

Tapered roller bearings

TYPE: Roller bearings, Tapered, Single row, matched bearings, Face-to-face

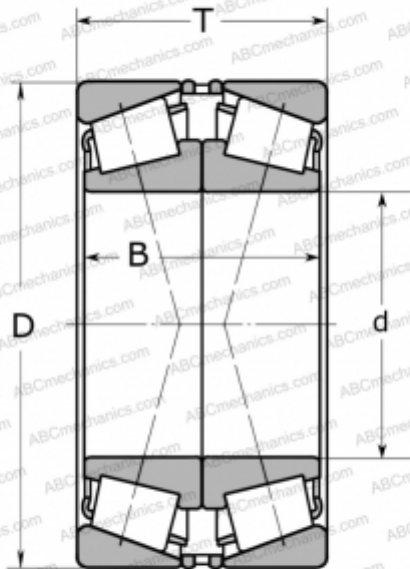

Technical specification

DIMENSIONS, MM

d	35,000
D	80,000
B	42,000
T	45,000

MANUFACTURER

[FAG](#)

INTERCHANGE

ABC	31307 J2/QDF
SKF	31307 J2/QDF

CALCULATION DATA

Basic dynamic load rating, C	103,000 kN
Basic static load rating, Co	128,000 kN
Fatigue load limit, Pu	14,900 kN
Reference speed	4600 r/min
Limiting speed	8800 r/min