


## 31308-A-N11CA-A50-90 FAG

Tapered roller bearings

TYPE: Roller bearings, Tapered, Single row, matched bearings, Face-to-face

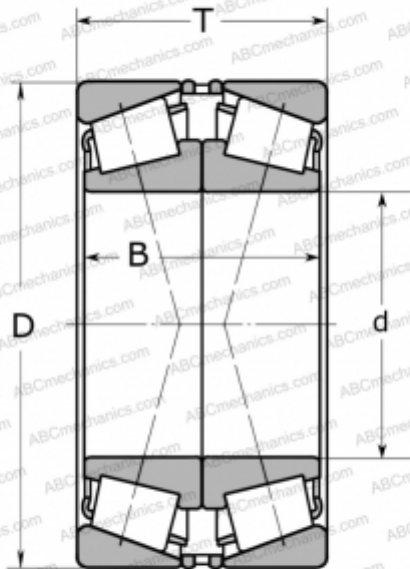

### Technical specification

#### DIMENSIONS, MM

d	40,000
D	90,000
B	46,000
T	50,000

#### MANUFACTURER

[FAG](#)

#### INTERCHANGE

ABC	<a href="#">31308 J2/QCL7CDF</a>
SKF	<a href="#">31308 J2/QCL7CDF</a>

#### CALCULATION DATA

Basic dynamic load rating, C	130,000 kN
Basic static load rating, Co	165,000 kN
Fatigue load limit, Pu	18,900 kN
Reference speed	4150 r/min
Limiting speed	7400 r/min