


BK1012-RS INA

Drawn cup needle roller bearings

TYPE: Roller bearings, Needle, Single row, Drawn cup, Closed end, with cage, lip seal RS on one side, metric

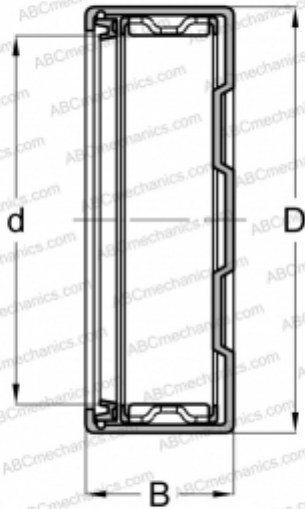

Technical specification

DIMENSIONS, MM

| | |
|---|--------|
| d | 10,000 |
| D | 14,000 |
| B | 12,000 |

MANUFACTURER

[INA](#)

INTERCHANGE

| | |
|-----|----------------------------|
| ABC | BK 1012 RS |
| FAG | BK 1012 RS |
| SKF | BK 1012 RS |

CALCULATION DATA

| | |
|------------------------------|-------------|
| Basic dynamic load rating, C | 4,400 kN |
| Basic static load rating, Co | 5,100 kN |
| Fatigue load limit, Pu | 0,650 kN |
| Limiting speed | 17000 r/min |