


## NA4903-2RSR INA

Needle roller bearings

TYPE: Roller bearings, Needle, Single row, With machined rings with flanges, with an inner ring, Lip seals on both side, metric

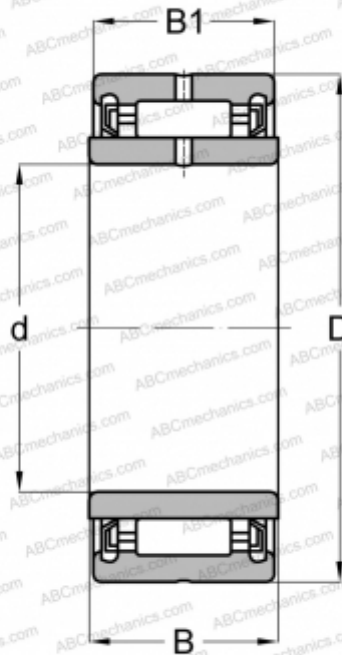

### DIMENSIONS, MM

d	17,000
D	30,000
B	14,000
B1	13,000

**MANUFACTURER** [INA](#)

### INTERCHANGE

ABC [NA 4903 2RS](#)

### INTERCHANGE

FAG	<a href="#">NA 4903 2RSR</a>
SKF	<a href="#">NA 4903.2RS</a>
TORRINGTON	<a href="#">NA 4903 2RS</a>
IKO	<a href="#">NA 4903 UU</a>
NSK	<a href="#">NA4903TT</a>
JNS	<a href="#">NA4902UU</a>
NTN	<a href="#">NA4902LL</a>
KOYO	<a href="#">NA4903A 2RS</a>
ABC	<a href="#">NA 4902 2RS</a>
FAG	<a href="#">NA 4902 2RSR</a>
SKF	<a href="#">NA 4902.2RS</a>
TORRINGTON	<a href="#">NA 4902 2RS</a>
IKO	<a href="#">NA 4902 UU</a>
NSK	<a href="#">NA4902TT</a>
INA	<a href="#">NA4902-2RSR</a>
KOYO	<a href="#">NA4902A 2RS</a>

### CALCULATION DATA

Basic dynamic load rating, C	10,000 kN
Basic static load rating, Co	11,000 kN
Fatigue load limit, Pu	2,180 kN
Limiting speed	9000 r/min