


## 54305 INA

Thrust ball bearings

TYPE: Ball bearings, Thrust ball bearing, Double direction, With spherical housing locating washer, separable

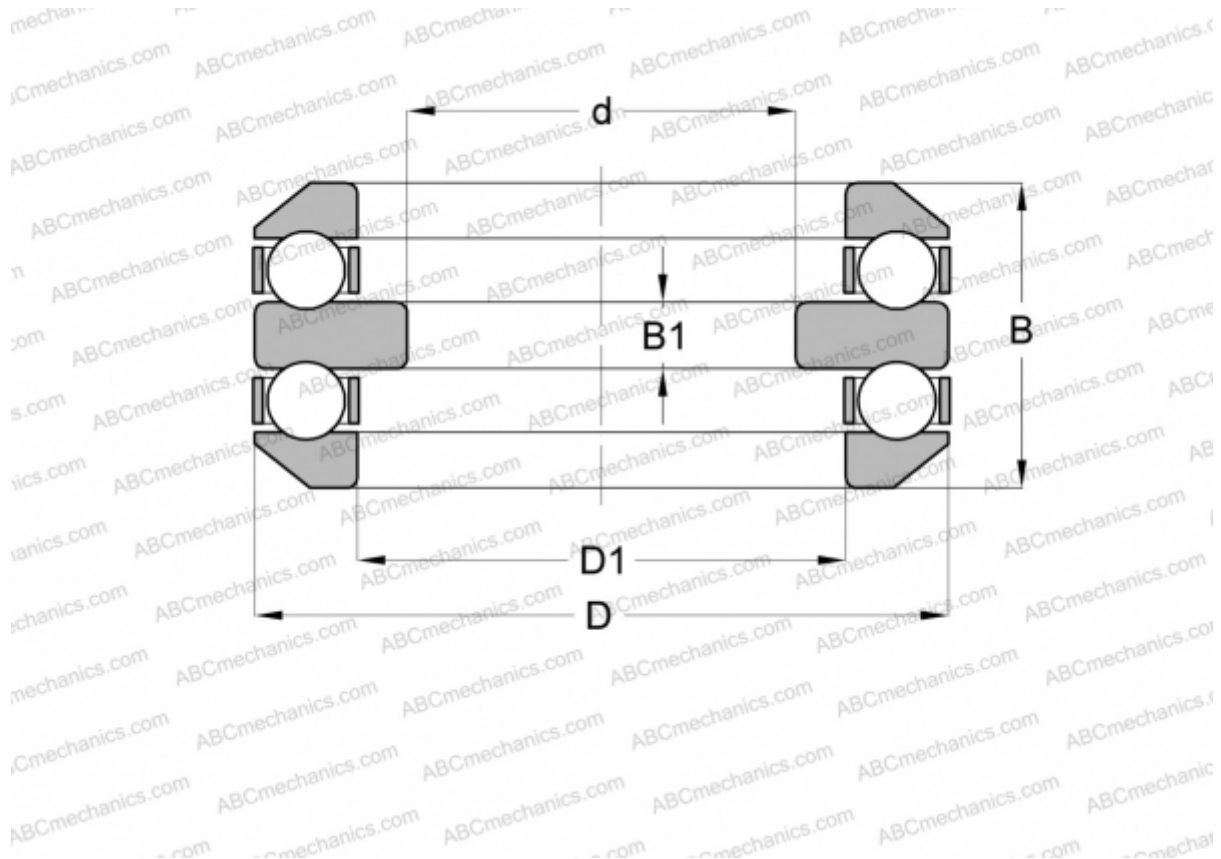

### Technical specification

#### DIMENSIONS, MM

|    |        |
|----|--------|
| d  | 20,000 |
| D  | 52,000 |
| D1 | 27,000 |
| B  | 37,600 |
| B1 | 8,000  |

**MANUFACTURER** [INA](#)

#### INTERCHANGE

|     |                       |
|-----|-----------------------|
| ABC | <a href="#">54305</a> |
| FAG | <a href="#">54305</a> |

#### CALCULATION DATA

|                              |            |
|------------------------------|------------|
| Basic dynamic load rating, C | 34,500 kN  |
| Basic static load rating, Co | 55,000 kN  |
| Fatigue load limit, Pu       | 2,450 kN   |
| Limiting speed               | 5300 r/min |



**ASSOCIATED PRODUCTS**

U305

