


RSBW25 TSUBAKI

Freewheel

TYPE: Freewheel, Self-contained freewheels, DC type, centered by plain bearings for low rotational speeds and sealed using shield protected O Rings

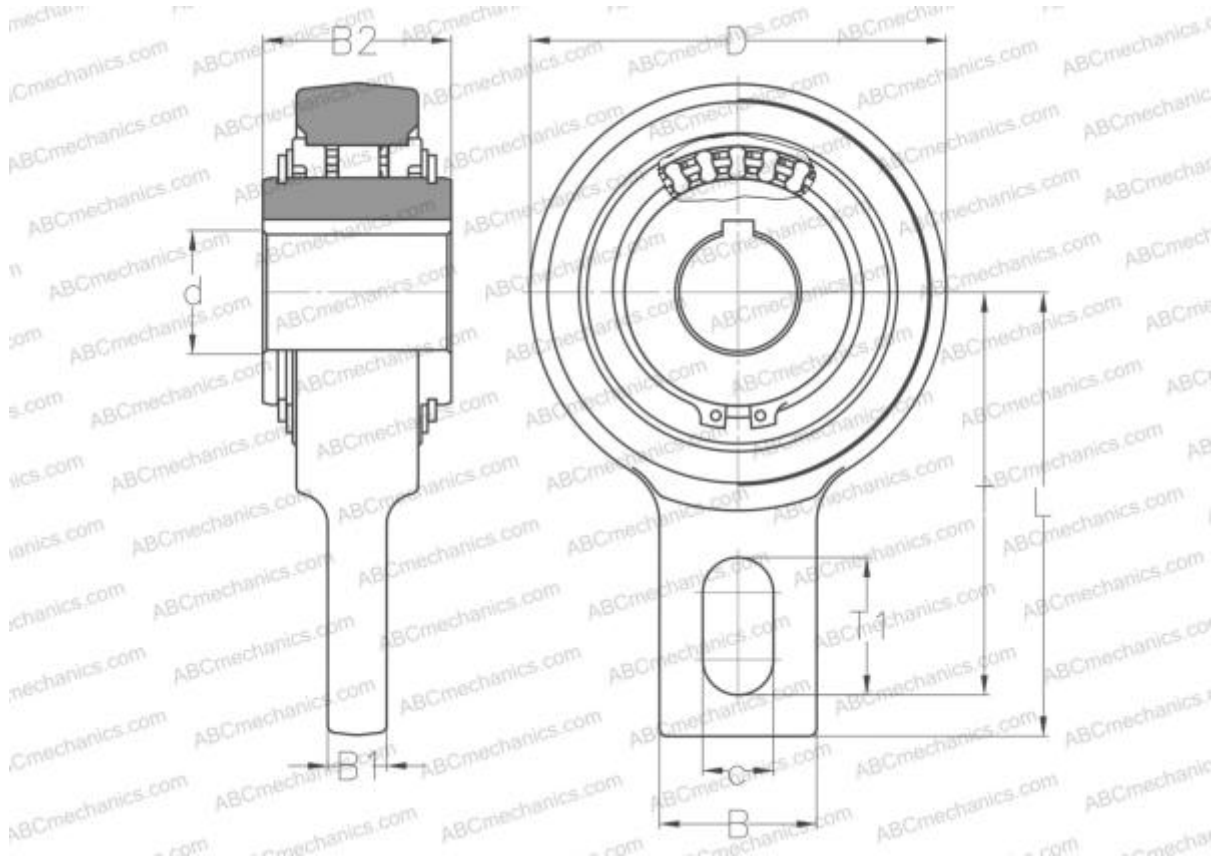

Technical specification

DIMENSIONS, MM

| | |
|----|---------|
| d | 25,000 |
| D | 106,000 |
| B | 40,000 |
| B1 | 15,000 |
| B2 | 48,000 |
| L | 113,000 |
| c | 18,000 |
| T | 102,500 |
| T1 | 35,000 |

MANUFACTURER [TSUBAKI](#)

INTERCHANGE

| | |
|---------|-------------------------|
| ABC | RSBW 25 |
| STIEBER | RSBW 25 |
| C.T.S. | GVG25 |

INTERCHANGE

| | |
|-------------|---------------------------|
| GMN | BSEU40-25 |
| RENOLD | CRBV25 |
| CROSS+MORSE | RSBF25 |