


LH25AN NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, Self-aligning type, Square type, High, Ball slide length - standard, Mounting tap

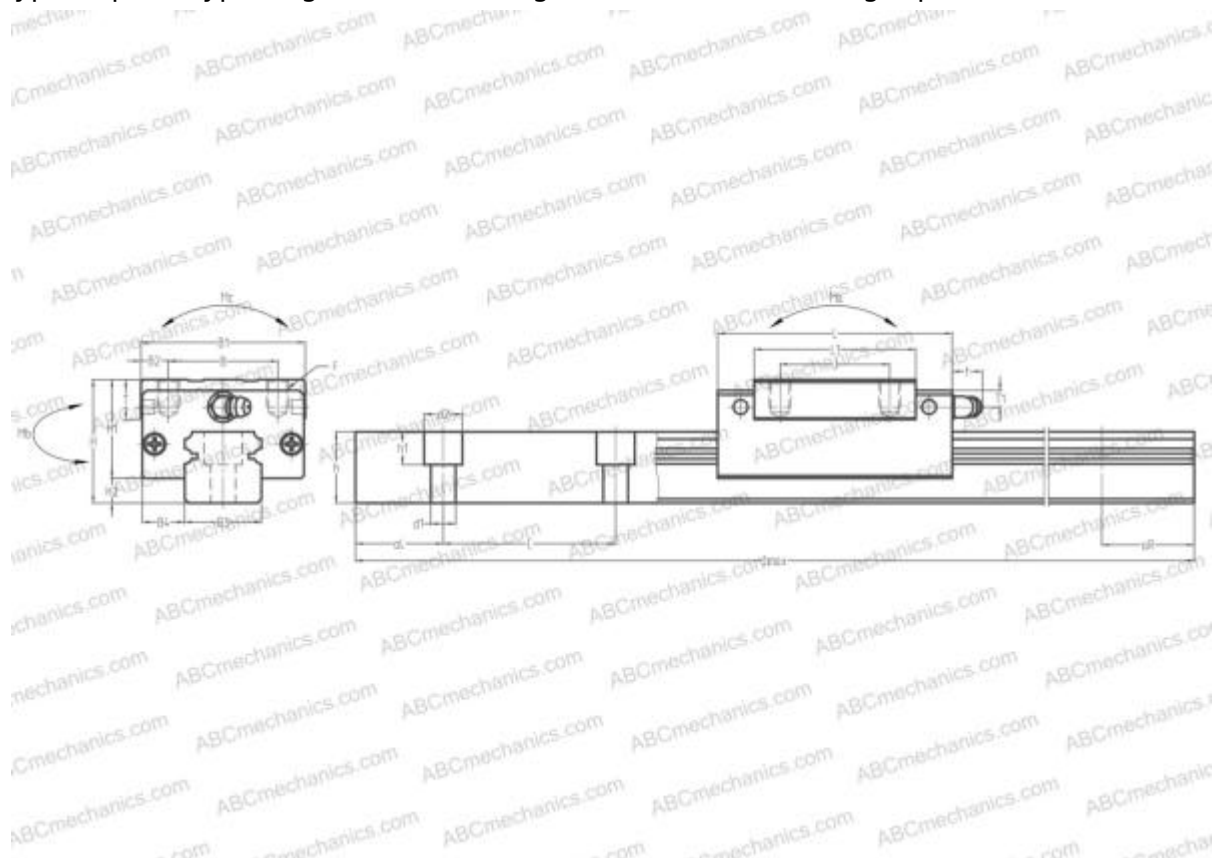

Technical specification

DIMENSIONS, MM

B1	48,000
H	40,000
L	79,000
B	35,000
J	35,000
L1	58,000
B2	6,500
B3	23,000
B4	12,500
H1	33,000
H2	7,000
T	12,000
T1	10,000
f	11,000
C	60,000

DIMENSIONS, MM

d1	7,000
d2	11,000
h	22,000
h1	9,000
L max	3960,000
aL	20,000
aR	20,000
F	M6x1x9

WEIGHT

Slide weight	0,550
Rail weight	3,600

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	LH25AN
THK	HSR25R

INTERCHANGE

IKO	LWHD25..B
HIWIN	HGH25CA
STAR	1621-2
Rockford Linear Motion	RPG25HR
INA	KUVE25-B-H
NB	SGL25HTF
THOMSON	AG 25EE
SCHNEEBERGER	BMC 25

CALCULATION DATA

Basic dynamic load rating, C	21,000 kN
Basic static load rating, Co	39,000 kN
Static permissible moment, Ma	0,315 kN-m
Static permissible moment, Mb	0,305 kN-m
Static permissible moment, Mc	0,355 kN-m

INCLUDED PRODUCTS

LAH25AN