


LH30AN NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, Self-aligning type, Square type, High, Ball slide length - standard, Mounting tap

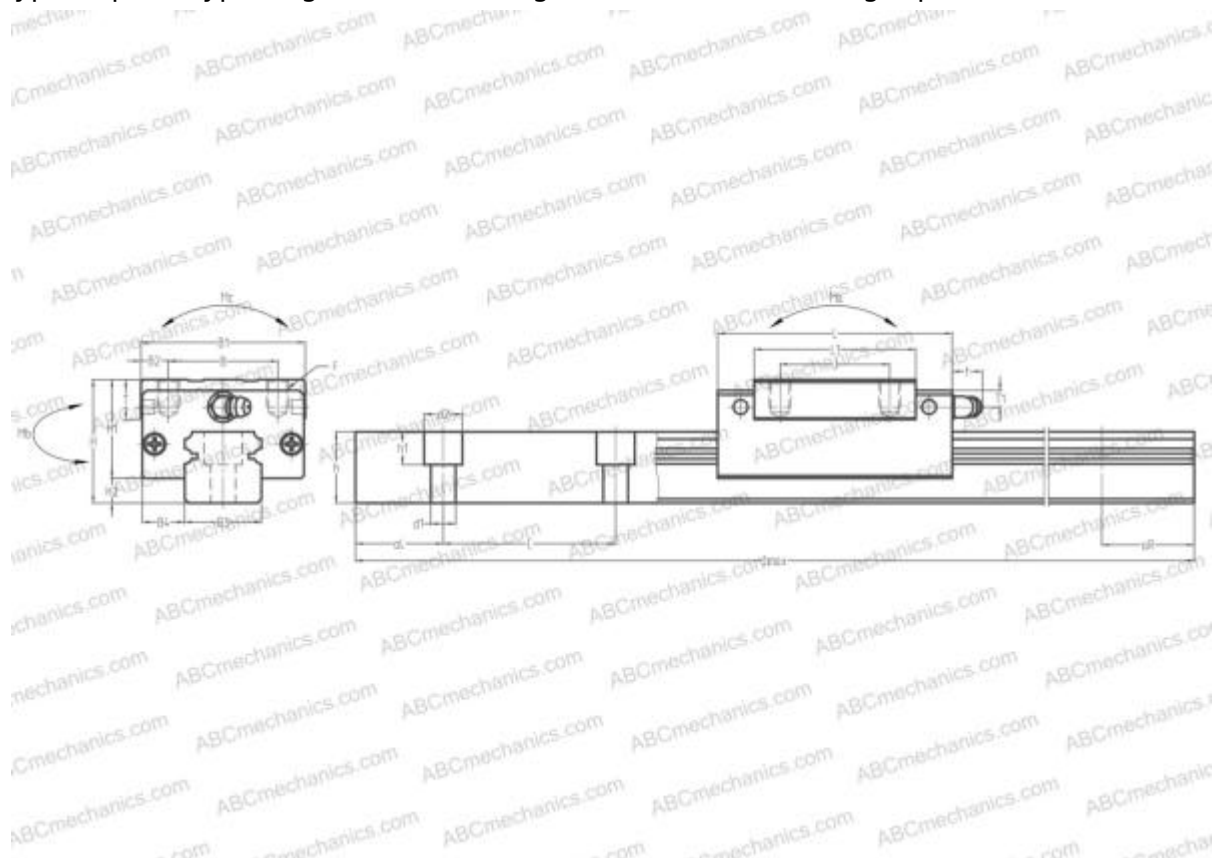

Technical specification

DIMENSIONS, MM

B1	60,000
H	45,000
L	85,600
B	40,000
J	40,000
L1	59,000
B2	10,000
B3	28,000
B4	16,000
H1	36,000
H2	9,000
T	14,000
T1	10,000
f	11,000
C	80,000

DIMENSIONS, MM

d1	9,000
d2	14,000
h	26,000
h1	12,000
L max	4000,000
aL	20,000
aR	20,000
F	M8x1.25x10

WEIGHT

Slide weight	0,770
Rail weight	5,200

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	LH30AN
THK	HSR30R

INTERCHANGE

IKO	LWHD30..B
HIWIN	HGH30CA
STAR	1621-7
Rockford Linear Motion	RPG30HR
INA	KUV30-B-H
NB	SGL30HTF
THOMSON	AG 30EE
SCHNEEBERGER	BMC 30

CALCULATION DATA

Basic dynamic load rating, C	25,700 kN
Basic static load rating, Co	45,000 kN
Static permissible moment, Ma	0,355 kN-m
Static permissible moment, Mb	0,355 kN-m
Static permissible moment, Mc	0,490 kN-m

INCLUDED PRODUCTS

LAH30AN