


LH35AN NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, Self-aligning type, Square type, High, Ball slide length - standard, Mounting tap

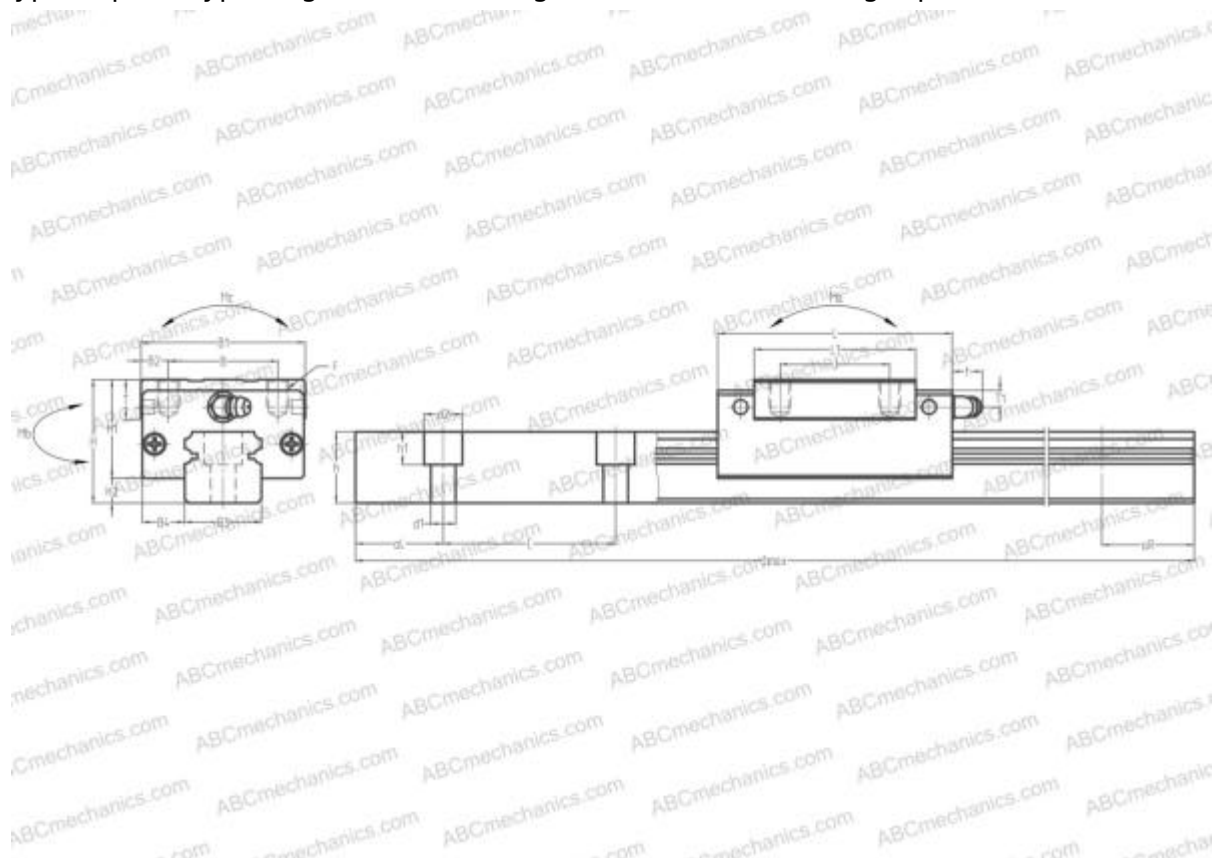

Technical specification

DIMENSIONS, MM

B1	70,000
H	55,000
L	109,000
B	50,000
J	50,000
L1	80,000
B2	10,000
B3	34,000
B4	18,000
H1	45,500
H2	9,500
T	15,000
T1	15,000
f	11,000
C	80,000

DIMENSIONS, MM

d1	9,000
d2	14,000
h	29,000
h1	12,000
L max	4000,000
aL	20,000
aR	20,000
F	M8x1.25x12

WEIGHT

Slide weight	1,500
Rail weight	7,200

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	LH35AN
THK	HSR35R

INTERCHANGE

IKO	LWHD35..B
HIWIN	HGH35CA
STAR	1621-3
Rockford Linear Motion	RPG35HR
INA	KUV35-B-H
NB	SGL35HTF
THOMSON	AG 35EE
SCHNEEBERGER	BMC 35

CALCULATION DATA

Basic dynamic load rating, C	39,000 kN
Basic static load rating, Co	68,500 kN
Static permissible moment, Ma	0,735 kN-m
Static permissible moment, Mb	0,715 kN-m
Static permissible moment, Mc	0,940 kN-m

INCLUDED PRODUCTS

LAH35AN