


LH65AN NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, Self-aligning type, Square type, High, Ball slide length - standard, Mounting tap

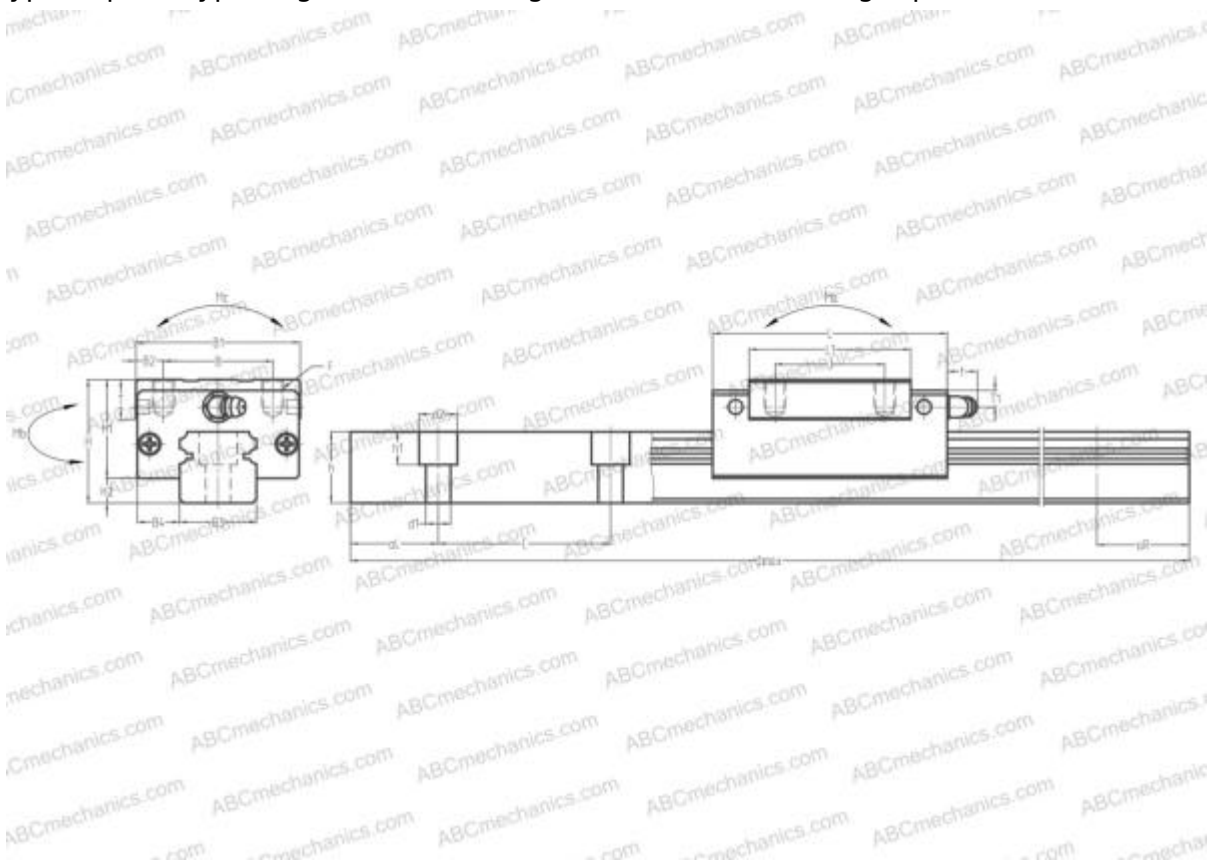

Technical specification

DIMENSIONS, MM

B1	126,000
H	90,000
L	193,000
B	76,000
J	70,000
L1	147,000
B2	25,000
B3	63,000
B4	31,500
H1	74,000
H2	16,000
T	23,000
T1	19,000
f	13,000
C	150,000

DIMENSIONS, MM

d1	18,000
d2	26,000
h	53,000
h1	22,000
L max	3900,000
aL	35,000
aR	35,000
F	M16x2x20

WEIGHT

Slide weight	7,700
Rail weight	24,300

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	LH65AN
THK	HSR65R

INTERCHANGE

IKO	LWHD65..B
HIWIN	HGH65CA
STAR	1622-6

CALCULATION DATA

Basic dynamic load rating, C	150,000 kN
Basic static load rating, Co	240,000 kN
Static permissible moment, Ma	4,850 kN-m
Static permissible moment, Mb	4,750 kN-m
Static permissible moment, Mc	6,150 kN-m

INCLUDED PRODUCTS

LAH65AN