


LS15AL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, Self-aligning type, Square type, Low, Ball slide length - standard, Mounting tap

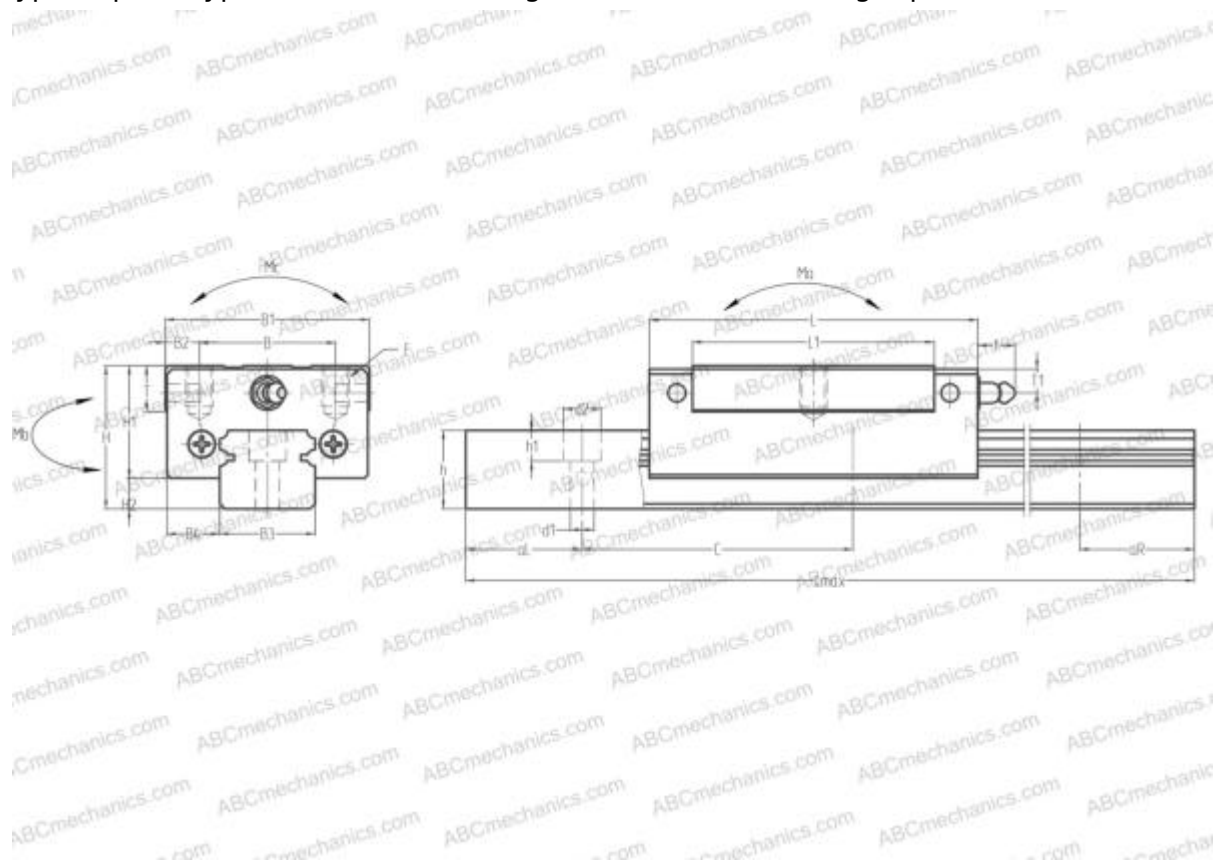

Technical specification

DIMENSIONS, MM

B1	34,000
H	24,000
L	56,800
B	26,000
J	26,000
L1	40,000
B2	4,000
B3	15,000
B4	9,500
H1	19,400
H2	4,600
T	10,000
T1	6,000
f	3,000
C	60,000

DIMENSIONS, MM

d1	3,500
d2	6,000
h	12,500
h1	4,500
L max	2000,000
aL	20,000
aR	20,000
F	M4x0.7x6

WEIGHT

Slide weight	0,200
Rail weight	1,400

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	LS15AL
THK	SR15W

INTERCHANGE

IKO	LWES15
HIWIN	EGH15CA
STAR	1622-1
Rockford Linear Motion	RPG15SW
NB	SGL15TF-D
THOMSON	AT 15F
INA	KUVE15-B-S

CALCULATION DATA

Basic dynamic load rating, C	6,700 kN
Basic static load rating, Co	12,500 kN
Static permissible moment, Ma	0,049 kN-m
Static permissible moment, Mb	0,049 kN-m
Static permissible moment, Mc	0,069 kN-m

INCLUDED PRODUCTS

LAS15AL