


LS25AL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, Self-aligning type, Square type, Low, Ball slide length - standard, Mounting tap

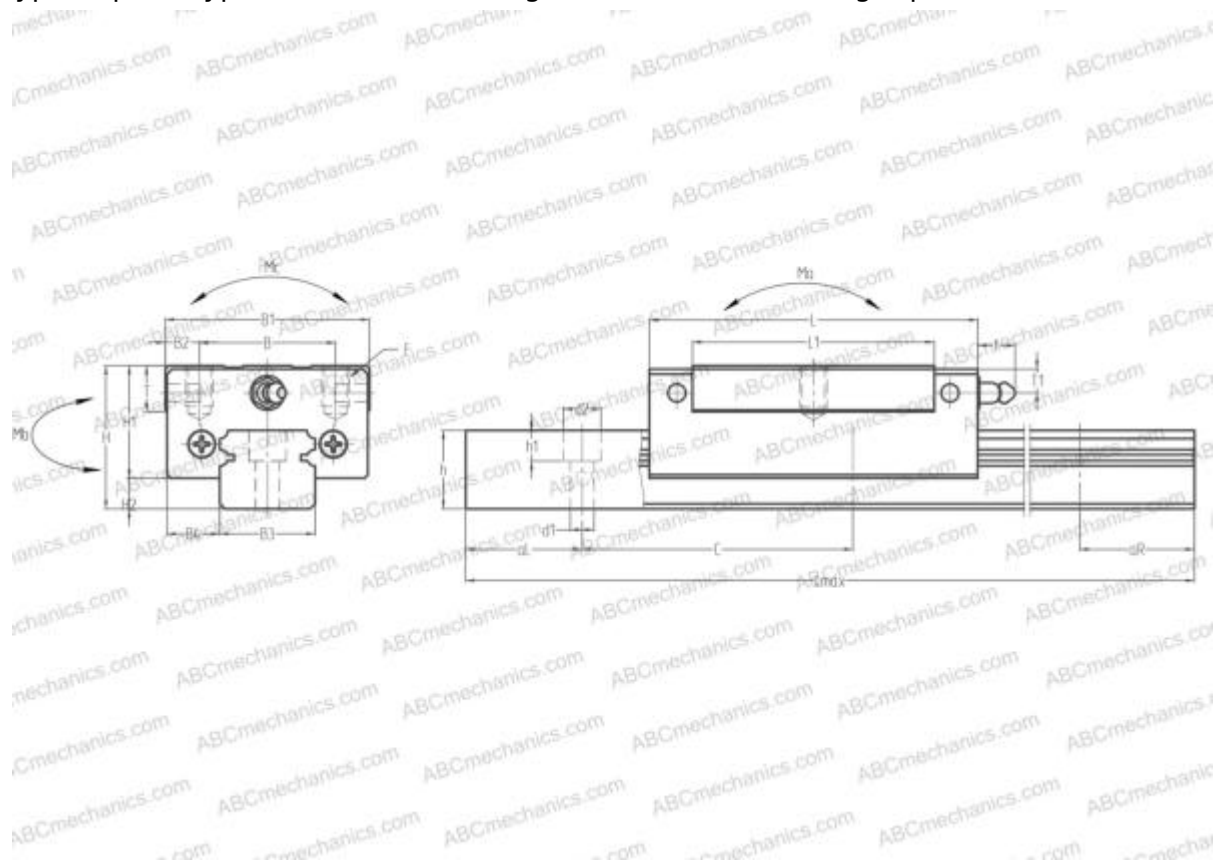

Technical specification

DIMENSIONS, MM

B1	48,000
H	33,000
L	81,600
B	35,000
J	35,000
L1	60,000
B2	6,500
B3	23,000
B4	12,500
H1	26,000
H2	7,000
T	12,000
T1	7,000
f	11,000
C	60,000

DIMENSIONS, MM

d1	7,000
d2	11,000
h	18,000
h1	9,000
L max	3960,000
aL	20,000
aR	20,000
F	M6x1x9

WEIGHT

Slide weight	0,510
Rail weight	3,100

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	LS25AL
THK	SR25WY

INTERCHANGE

IKO	LWES25
HIWIN	EGH25CA
STAR	1694-2
Rockford Linear Motion	RPG25SW
NB	SGL25TF
THOMSON	AT 25F
INA	KUVE25-B-S

CALCULATION DATA

Basic dynamic load rating, C	14,400 kN
Basic static load rating, Co	29,100 kN
Static permissible moment, Ma	0,206 kN-m
Static permissible moment, Mb	0,196 kN-m
Static permissible moment, Mc	0,245 kN-m

INCLUDED PRODUCTS

LAS25AL