


## LS30AL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, Self-aligning type, Square type, Low, Ball slide length - standard, Mounting tap

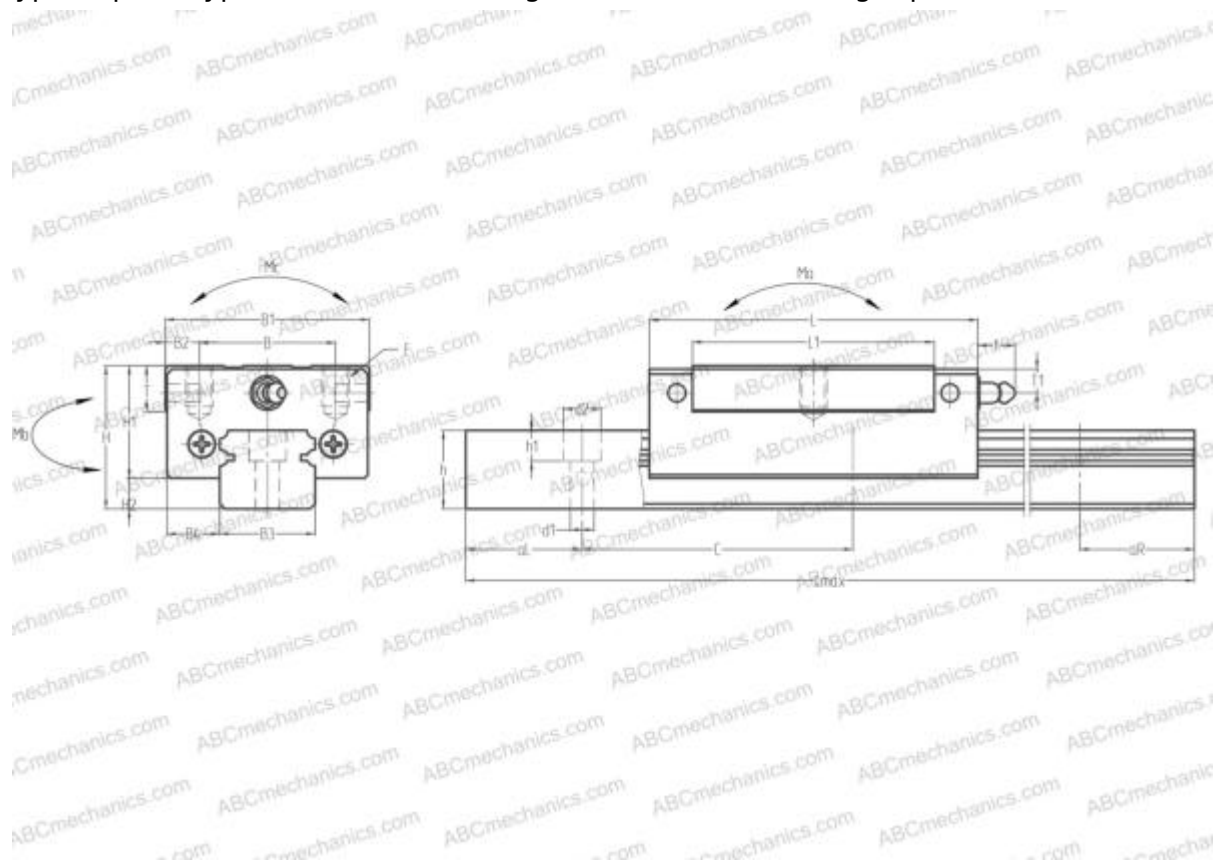

### Technical specification

#### DIMENSIONS, MM

B1	60,000
H	42,000
L	96,400
B	40,000
J	40,000
L1	71,000
B2	10,000
B3	28,000
B4	16,000
H1	33,000
H2	9,000
T	13,000
T1	8,000
f	11,000
C	80,000

#### DIMENSIONS, MM

d1	7,000
d2	11,000
h	23,000
h1	9,000
L max	4000,000
aL	20,000
aR	20,000
F	M8x1.25x12

#### WEIGHT

Slide weight	0,850
Rail weight	4,800

#### MANUFACTURER

[NSK](#)

#### INTERCHANGE

ABC	<a href="#">LS30AL</a>
THK	<a href="#">SR30W</a>

## INTERCHANGE

IKO	<a href="#">LWES30</a>
HIWIN	<a href="#">EGH30CA</a>
Rockford Linear Motion	<a href="#">RPG30SW</a>
NB	<a href="#">SGL30TF</a>
THOMSON	<a href="#">AT 30F</a>
INA	<a href="#">KUV30-B-S</a>

## CALCULATION DATA

Basic dynamic load rating, C	23,400 kN
Basic static load rating, Co	43,000 kN
Static permissible moment, Ma	0,355 kN-m
Static permissible moment, Mb	0,355 kN-m
Static permissible moment, Mc	0,470 kN-m

## INCLUDED PRODUCTS

LAS30AL