


## LS35AL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, Self-aligning type, Square type, Low, Ball slide length - standard, Mounting tap

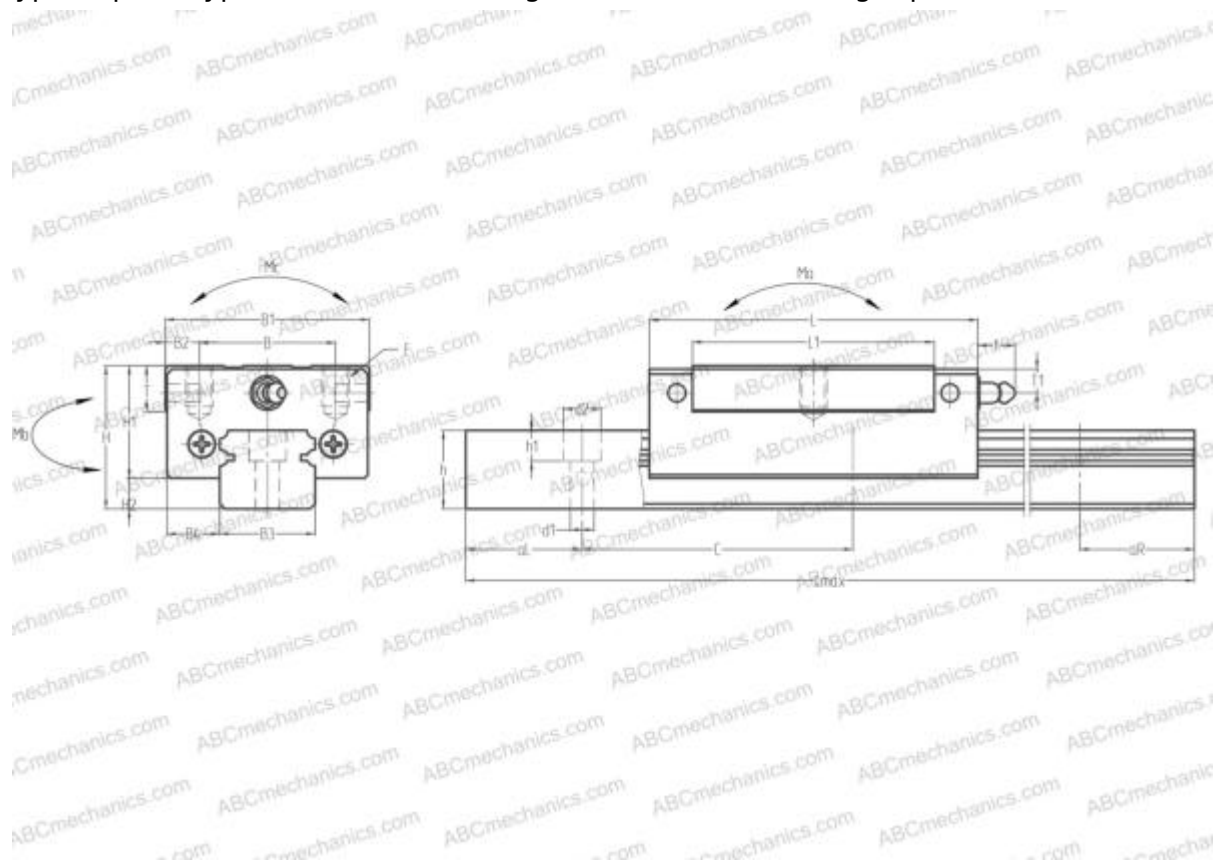

### Technical specification

#### DIMENSIONS, MM

B1	70,000
H	48,000
L	108,000
B	50,000
J	50,000
L1	80,000
B2	10,000
B3	34,000
B4	18,000
H1	37,500
H2	10,500
T	14,000
T1	8,500
f	11,000
C	80,000

#### DIMENSIONS, MM

d1	9,000
d2	14,000
h	27,500
h1	12,000
L max	4000,000
aL	20,000
aR	20,000
F	M8x1.25x12

#### WEIGHT

Slide weight	1,300
Rail weight	7,000

#### MANUFACTURER

[NSK](#)

#### INTERCHANGE

ABC	<a href="#">LS35AL</a>
THK	<a href="#">SR35W</a>

## INTERCHANGE

IKO	<a href="#">LWES35</a>
HIWIN	<a href="#">EGH35CA</a>
STAR	<a href="#">1622-3</a>
Rockford Linear Motion	<a href="#">RPG35SW</a>
NB	<a href="#">SGL35TF</a>
INA	<a href="#">KUVE35-B-S</a>

## CALCULATION DATA

Basic dynamic load rating, C	32,500 kN
Basic static load rating, Co	58,500 kN
Static permissible moment, Ma	0,570 kN-m
Static permissible moment, Mb	0,560 kN-m
Static permissible moment, Mc	0,775 kN-m

## INCLUDED PRODUCTS

LAS35AL