


SS20AL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, Self-aligning type, Square type, Low, Ball slide length - standard, Mounting tap, Low noise, smooth operation type

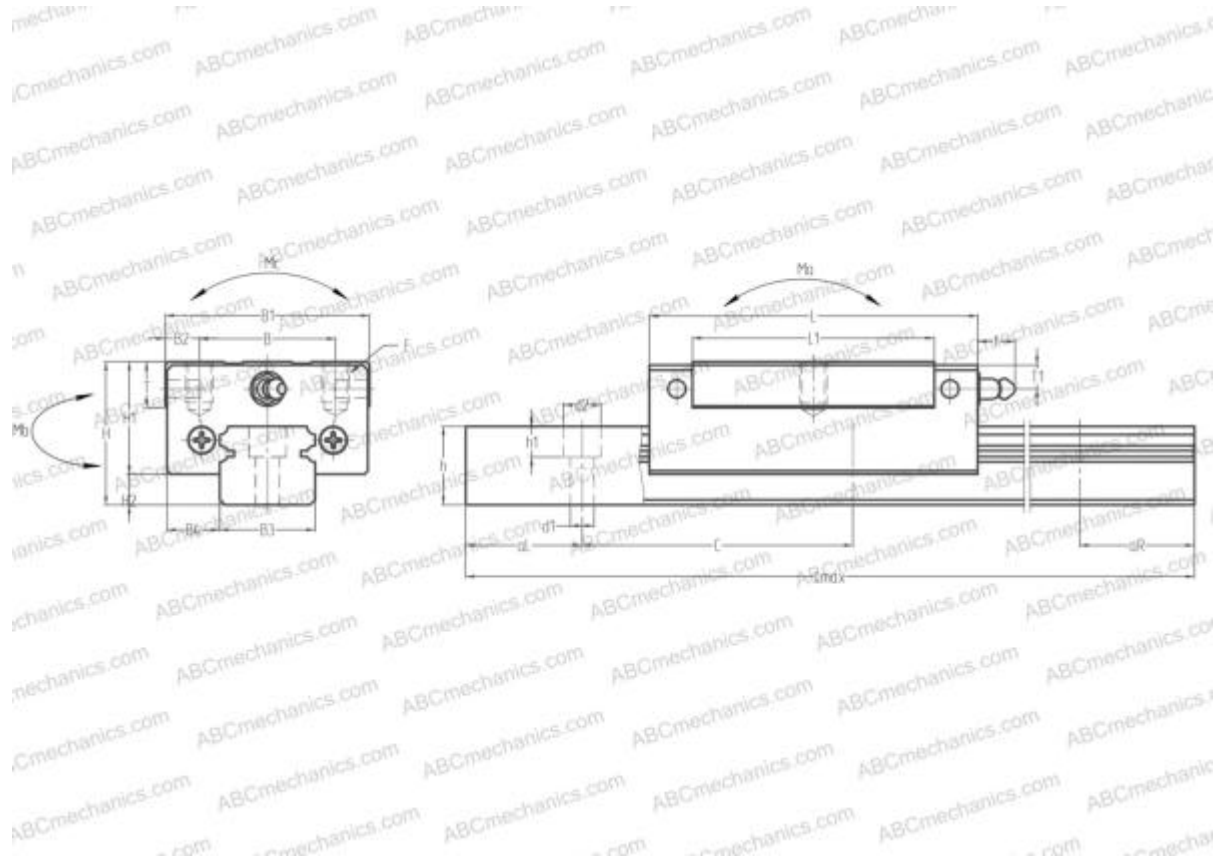

Technical specification



DIMENSIONS, MM

B1	42,000
H	28,000
L	65,200
B	32,000
J	32,000
L1	48,000
D2	10,000
B2	5,000
B3	20,000
B4	11,000
H1	22,000
H2	6,000
T	12,000
T1	5,500
f	11,000

INTERCHANGE

THK	SSR20XW
IKO	LWES20..Q

CALCULATION DATA

Basic dynamic load rating, C	11,100 kN
Basic static load rating, Co	21,800 kN
Static permissible moment, Ma	0,124 kN-m
Static permissible moment, Mb	0,104 kN-m
Static permissible moment, Mc	0,149 kN-m

INCLUDED PRODUCTS

SAS20AL

DIMENSIONS, MM

C	60,000
d1	6,000
d2	9,500
h	15,500
h1	8,500
L max	3960,000
aL	20,000
aR	20,000
F	M5x0.8x7

WEIGHT

Slide weight	0,280
Rail weight	2,300

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	SS20AL
-----	------------------------

