


SAS25AL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, Self-aligning type, Square type, Low, Ball slide length - standard, Mounting tap, Low noise, smooth operation type, Interchangeable part

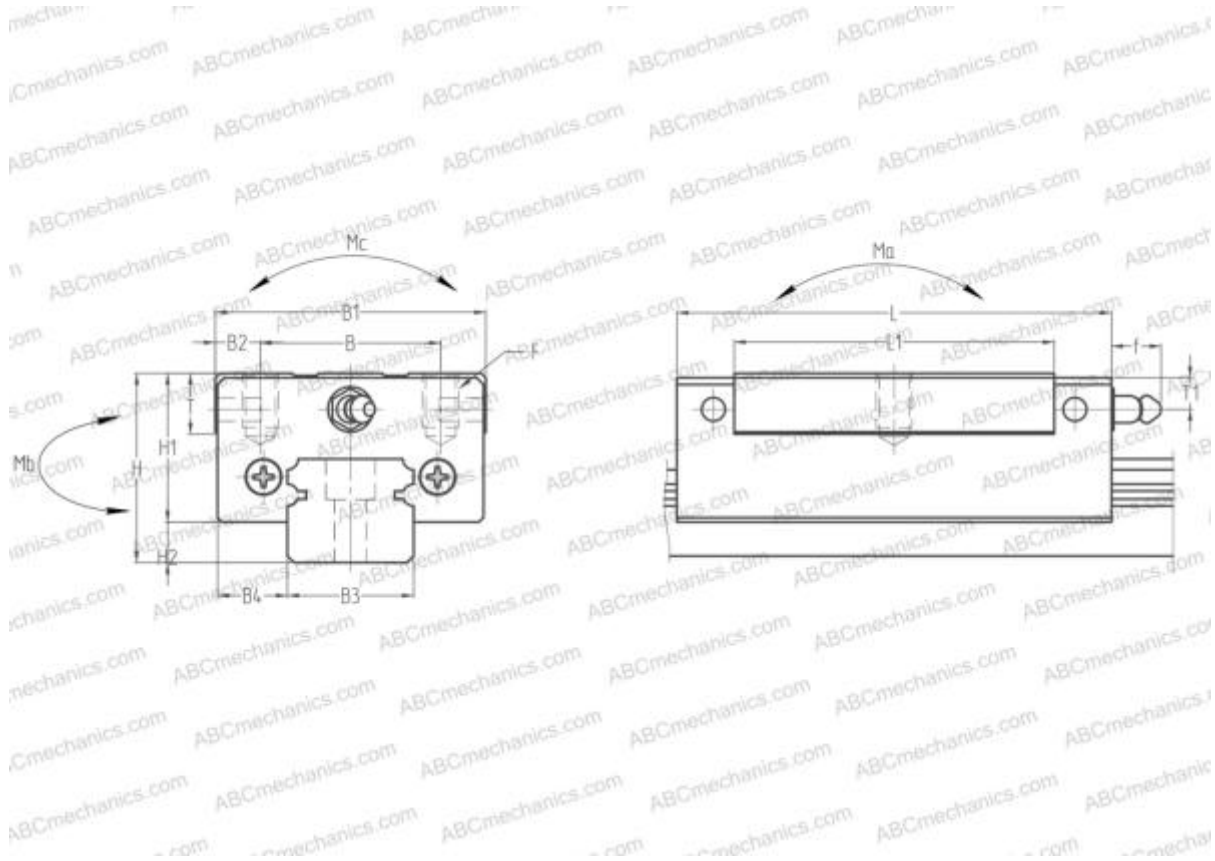

Technical specification

DIMENSIONS, MM

B1	48,000
H	33,000
L	81,600
B	35,000
J	35,000
L1	60,000
D2	11,500
B2	6,500
B3	23,000
B4	12,500
H1	26,000
H2	7,000
T	12,000
T1	7,000
f	11,000

DIMENSIONS, MM

F	M6x1x9
---	--------

SLIDE WEIGHT 0,510

MANUFACTURER [NSK](https://www.nsk.com)

CALCULATION DATA

Basic dynamic load rating, C	17,900 kN
Basic static load rating, Co	33,500 kN
Static permissible moment, Ma	0,242 kN-m
Static permissible moment, Mb	0,203 kN-m
Static permissible moment, Mc	0,266 kN-m