


## LH15HL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, Self-aligning type, Flanged type, Low, Ball slide length - long, Mounting bolt hole

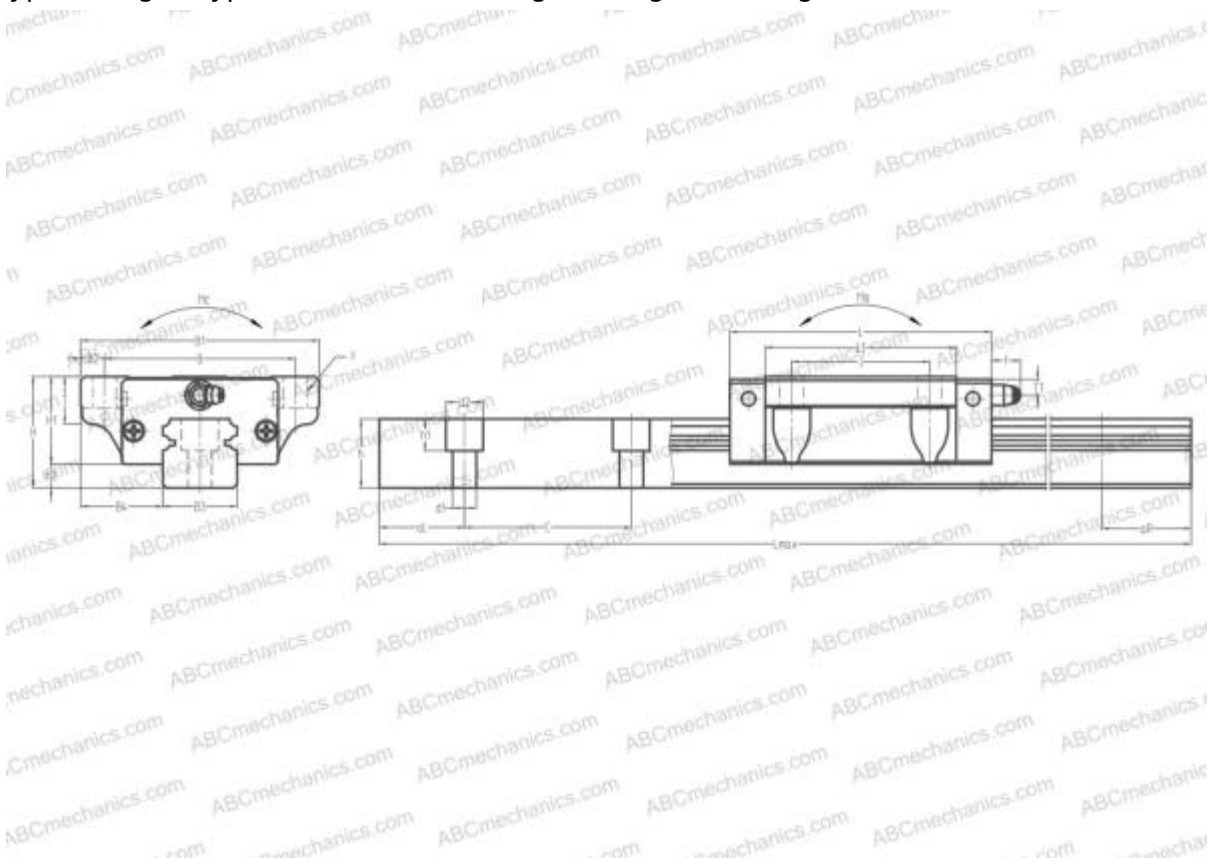

### Technical specification

#### DIMENSIONS, MM

B1	47,000
H	24,000
L	74,000
B	38,000
J	30,000
L1	58,000
B3	15,000
B4	16,000
H1	19,400
H2	4,600
T	8,000
T1	4,500
f	3,300
C	60,000
d1	4,500

#### DIMENSIONS, MM

d2	7,500
h	15,000
h1	5,300
L max	2000,000
aL	20,000
aR	20,000
F	4.5x7

#### WEIGHT

Slide weight	0,170
Rail weight	1,600

#### MANUFACTURER

[NSK](#)

#### INTERCHANGE

ABC	<a href="#">LH15HL</a>
STAR	<a href="#">1653-1</a>



## **CALCULATION DATA**

Basic dynamic load rating, C	14,600 kN
Basic static load rating, Co	32,000 kN
Static permissible moment, Ma	0,216 kN-m
Static permissible moment, Mb	0,181 kN-m
Static permissible moment, Mc	0,166 kN-m

## **INCLUDED PRODUCTS**

LAH15HL

