


## LH25HL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, Self-aligning type, Flanged type, Low, Ball slide length - long, Mounting bolt hole

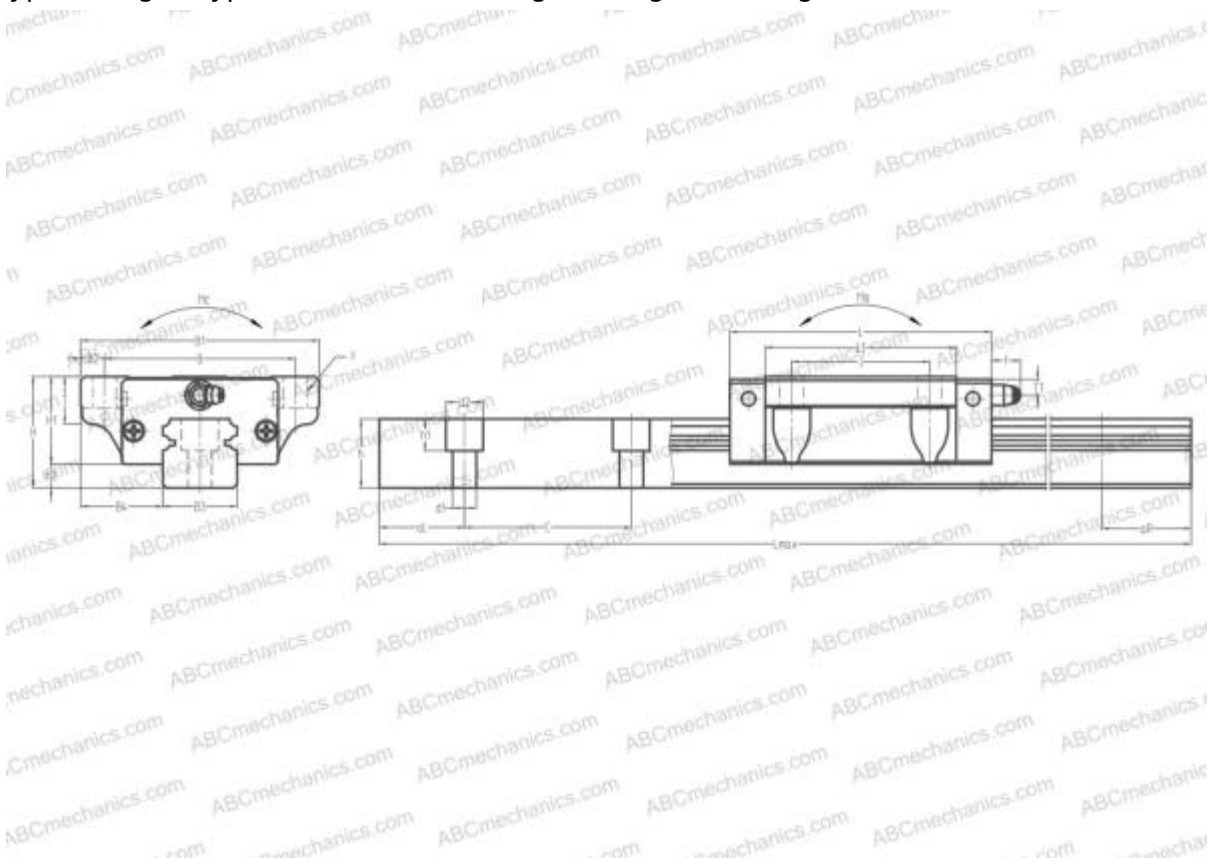

### Technical specification

#### DIMENSIONS, MM

B1	70,000
H	36,000
L	107,000
B	57,000
J	45,000
L1	86,000
B2	6,500
B3	23,000
B4	23,500
H1	29,000
H2	7,000
T	11,000
T1	6,000
f	11,000
C	60,000

#### DIMENSIONS, MM

d1	7,000
d2	11,000
h	22,000
h1	9,000
L max	3960,000
aL	20,000
aR	20,000
F	7x10

#### WEIGHT

Slide weight	0,930
Rail weight	3,600

#### MANUFACTURER

[NSK](#)

#### INTERCHANGE

ABC	<a href="#">LH25HL</a>
THK	<a href="#">HSR25LB</a>

## INTERCHANGE

IKO	<a href="#">LWHG25</a>
HIWIN	<a href="#">HGW25HB</a>
STAR	<a href="#">1653-2</a>

## CALCULATION DATA

Basic dynamic load rating, C	26,900 kN
Basic static load rating, Co	52,500 kN
Static permissible moment, Ma	0,530 kN-m
Static permissible moment, Mb	0,520 kN-m
Static permissible moment, Mc	0,470 kN-m

## INCLUDED PRODUCTS

LAH25HL