


## SH20EL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, Self-aligning type, Flanged type, Low, Ball slide length - standard, Mounting tap, Low noise, smooth operation type

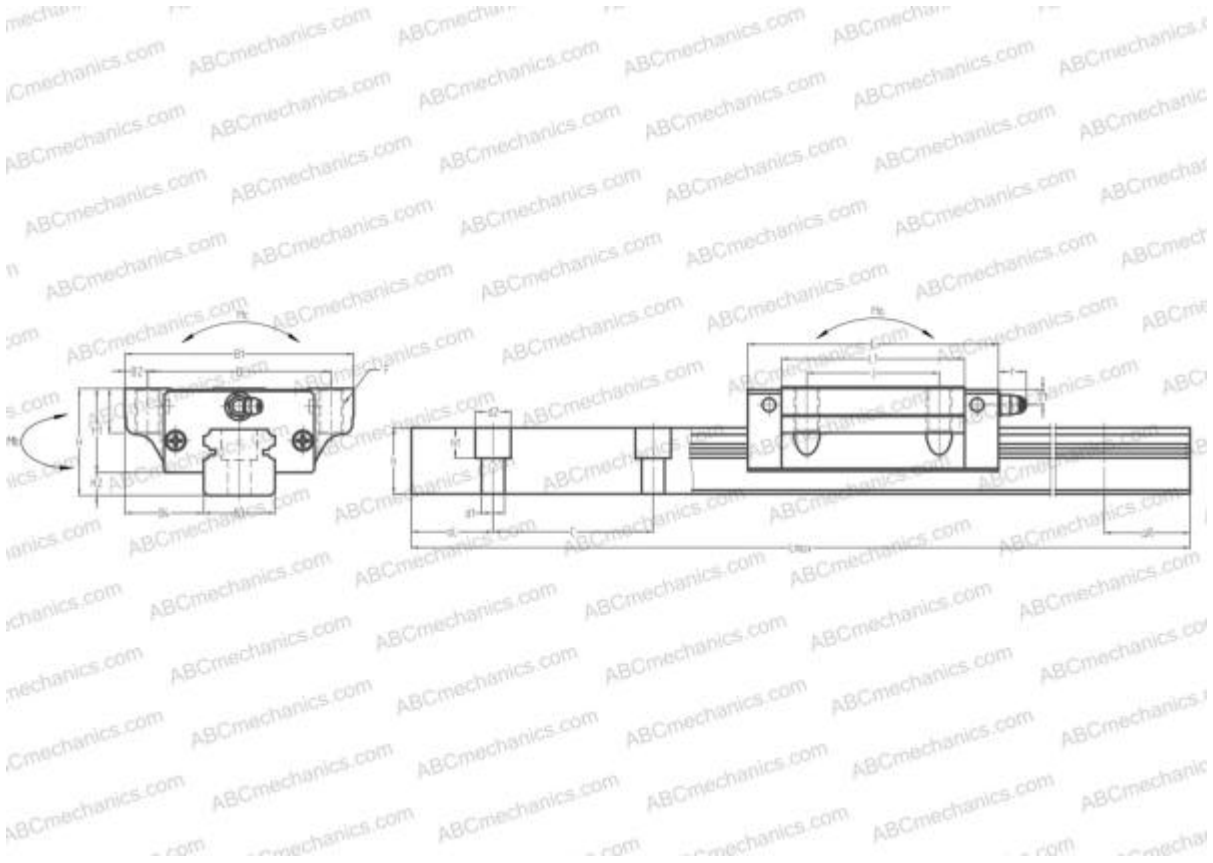

### Technical specification



## DIMENSIONS, MM

B1	63,000
H	30,000
L	69,800
B	53,000
J	40,000
L1	50,000
D2	10,000
B2	5,000
B3	20,000
B4	21,500
H1	25,000
H2	5,000
T	10,000
T1	5,000
f	11,000

## INTERCHANGE

THK	<a href="#">SHS20C</a>
STAR	<a href="#">1651-8</a>

## CALCULATION DATA

Basic dynamic load rating, C	13,400 kN
Basic static load rating, Co	22,800 kN
Static permissible moment, Ma	0,157 kN-m
Static permissible moment, Mb	0,157 kN-m
Static permissible moment, Mc	0,196 kN-m

## INCLUDED PRODUCTS

SAH20EL

## DIMENSIONS, MM

C	60,000
d1	6,000
d2	9,500
h	18,000
h1	8,500
L max	3960,000
aL	20,000
aR	20,000
F	M6x1x10

## WEIGHT

Slide weight	0,450
Rail weight	2,600

## MANUFACTURER

[NSK](#)

## INTERCHANGE

ABC	<a href="#">SH20EL</a>
-----	------------------------

