


SH25EL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, Self-aligning type, Flanged type, Low, Ball slide length - standard, Mounting tap, Low noise, smooth operation type

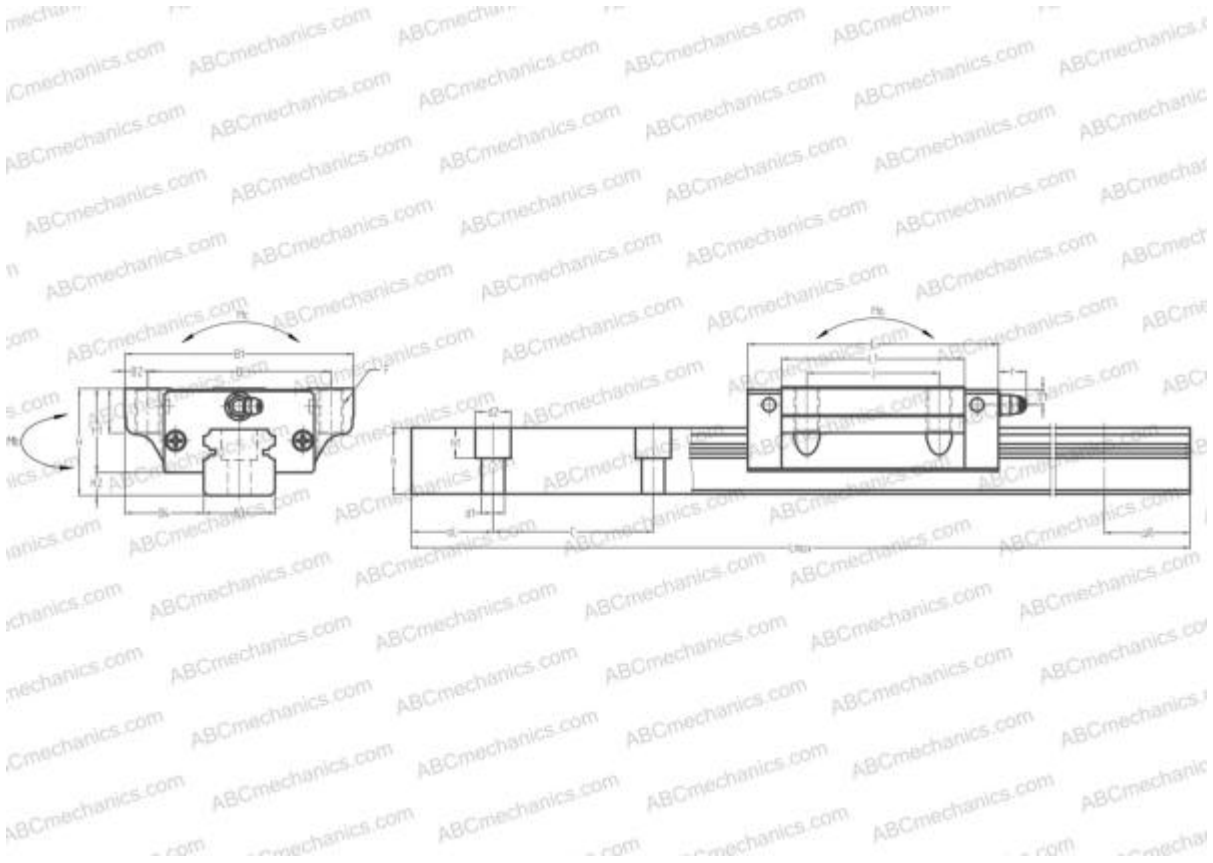

Technical specification



DIMENSIONS, MM

B1	70,000
H	36,000
L	79,000
B	57,000
J	45,000
L1	58,000
D2	11,500
B2	6,500
B3	23,000
B4	23,500
H1	29,000
H2	7,000
T	11,000
T1	6,000
f	11,000

INTERCHANGE

THK	SHS25C
STAR	1651-2

CALCULATION DATA

Basic dynamic load rating, C	19,800 kN
Basic static load rating, Co	36,000 kN
Static permissible moment, Ma	0,284 kN-m
Static permissible moment, Mb	0,284 kN-m
Static permissible moment, Mc	0,333 kN-m

INCLUDED PRODUCTS

SAH25EL

DIMENSIONS, MM

C	60,000
d1	7,000
d2	11,000
h	22,000
h1	9,000
L max	3960,000
aL	20,000
aR	20,000
F	M8x1.25x16

WEIGHT

Slide weight	0,630
Rail weight	3,600

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	SH25EL
-----	------------------------

