


SH25HL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, Self-aligning type, Flanged type, Low, Ball slide length - long, Mounting bolt hole, Low noise, smooth operation type

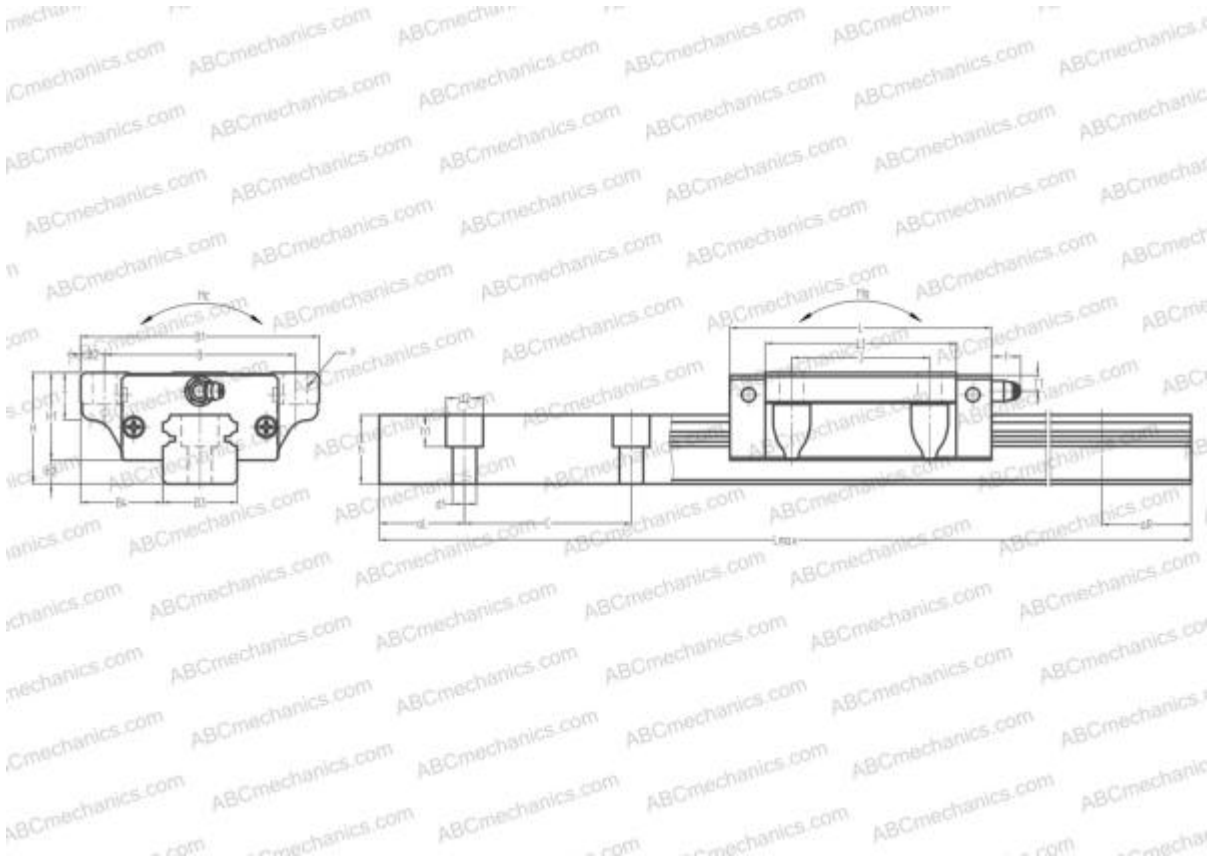

Technical specification



DIMENSIONS, MM

B1	70,000
H	36,000
L	107,000
B	57,000
J	45,000
L1	86,000
D2	11,500
B2	6,500
B3	23,000
B4	23,500
H1	29,000
H2	7,000
T	11,000
T1	6,000
f	11,000

INTERCHANGE

THK [SHS25LC](#)

CALCULATION DATA

Basic dynamic load rating, C	25,800 kN
Basic static load rating, Co	49,100 kN
Static permissible moment, Ma	0,519 kN-m
Static permissible moment, Mb	0,510 kN-m
Static permissible moment, Mc	0,451 kN-m

INCLUDED PRODUCTS

SAH25HL

DIMENSIONS, MM

C	60,000
d1	7,000
d2	11,000
h	22,000
h1	9,000
L max	3960,000
aL	20,000
aR	20,000
F	7x10

WEIGHT

Slide weight	0,930
Rail weight	3,600

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC [SH25HL](#)

