


SS35EL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, Self-aligning type, Flanged type, Low, Ball slide length - standard, Mounting tap, Compact, Low noise, smooth operation type

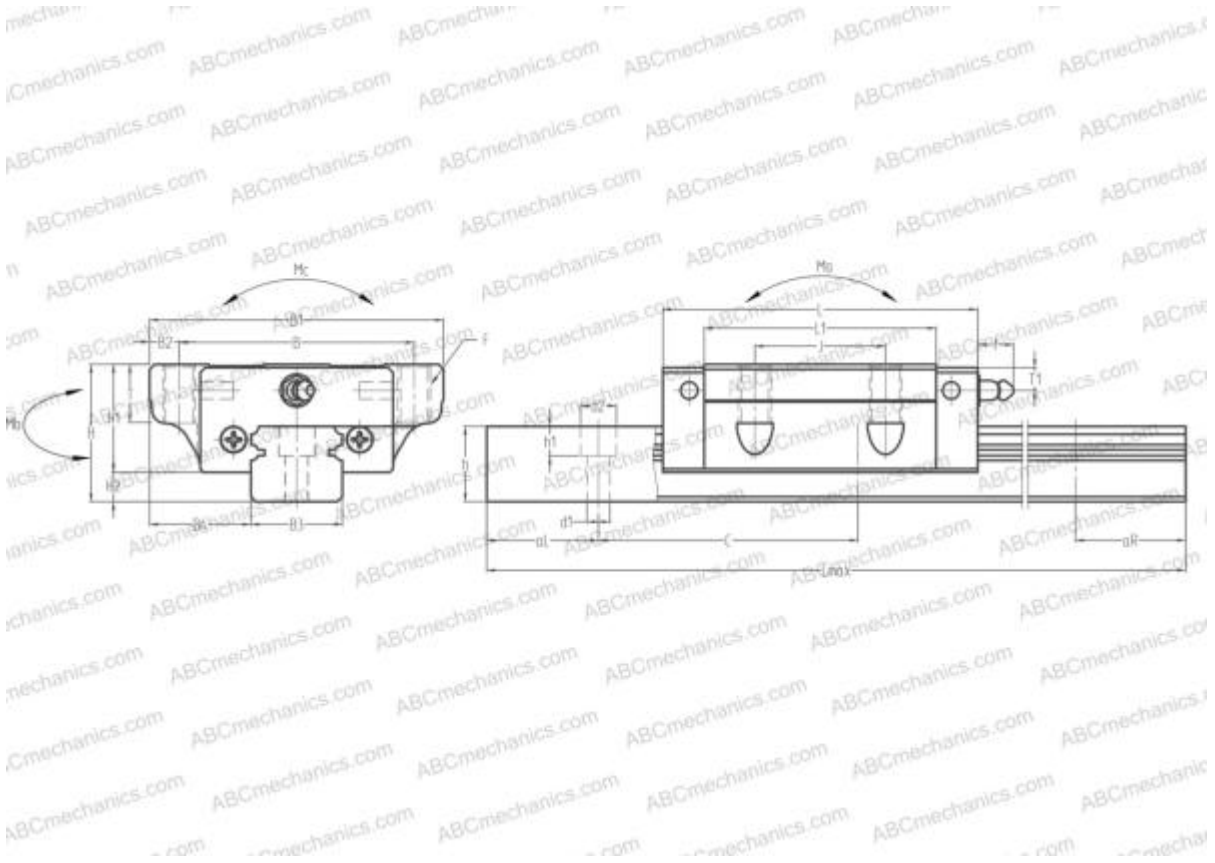

Technical specification



DIMENSIONS, MM

B1	100,000
H	48,000
L	108,000
B	82,000
J	50,000
L1	80,000
D2	17,000
B2	9,000
B3	34,000
B4	33,000
H1	37,500
H2	10,500
T	12,000
T1	8,500
f	11,000

INTERCHANGE

IKO	LWET35..Q
-----	---------------------------

CALCULATION DATA

Basic dynamic load rating, C	31,100 kN
Basic static load rating, Co	53,800 kN
Static permissible moment, Ma	0,492 kN-m
Static permissible moment, Mb	0,487 kN-m
Static permissible moment, Mc	0,724 kN-m

INCLUDED PRODUCTS

SAS35EL

DIMENSIONS, MM

C	80,000
d1	9,000
d2	14,000
h	27,500
h1	12,000
L max	4000,000
aL	20,000
aR	20,000
F	M10x1.5x20

WEIGHT

Slide weight	1,700
Rail weight	7,000

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	SS35EL
-----	------------------------

