


SS20KL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, Self-aligning type, Flanged type, Low, Ball slide length - short, Mounting bolt hole, Compact, Low noise, smooth operation type

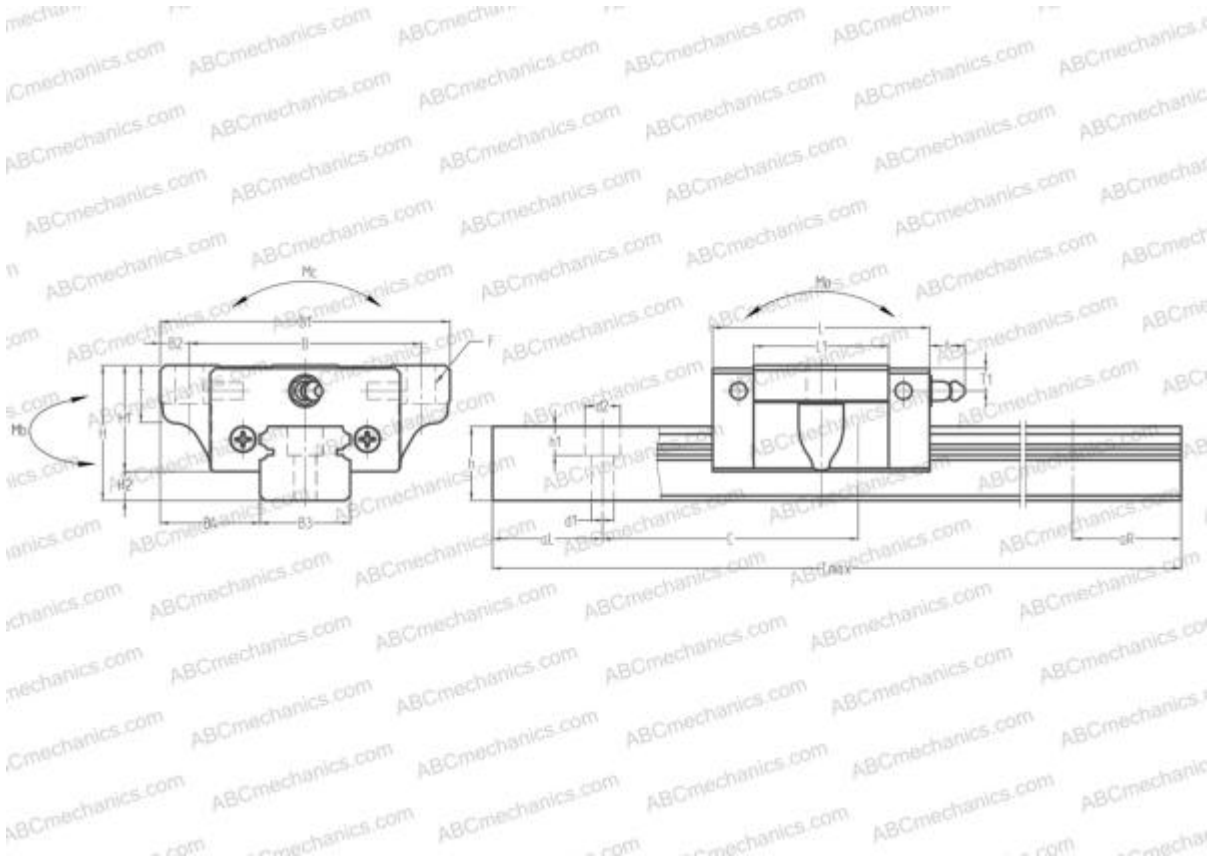

Technical specification

DIMENSIONS, MM

B1	59,000
H	8,500
L	47,200
B	49,000
L1	30,000
D2	10,000
B2	5,000
B3	20,000
B4	19,500
H1	22,000
H2	6,000
T	10,000
T1	5,500
f	11,000
C	60,000

DIMENSIONS, MM

d1	6,000
d2	9,500
h	15,500
h1	8,500
L max	3960,000
aL	20,000
aR	20,000
F	5.5x9

WEIGHT

Slide weight	0,240
Rail weight	2,300

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	SS20KL
-----	------------------------



CALCULATION DATA

Basic dynamic load rating, C	6,050 kN
Basic static load rating, Co	10,700 kN
Static permissible moment, Ma	0,029 kN-m
Static permissible moment, Mb	0,029 kN-m
Static permissible moment, Mc	0,069 kN-m

INCLUDED PRODUCTS

SAS20KL

