


LW17EL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, High vertical load carrying capacity type, High moment load carrying type (Wide rail type), Flanged type, Low, Ball slide length - standard, Mounting tap

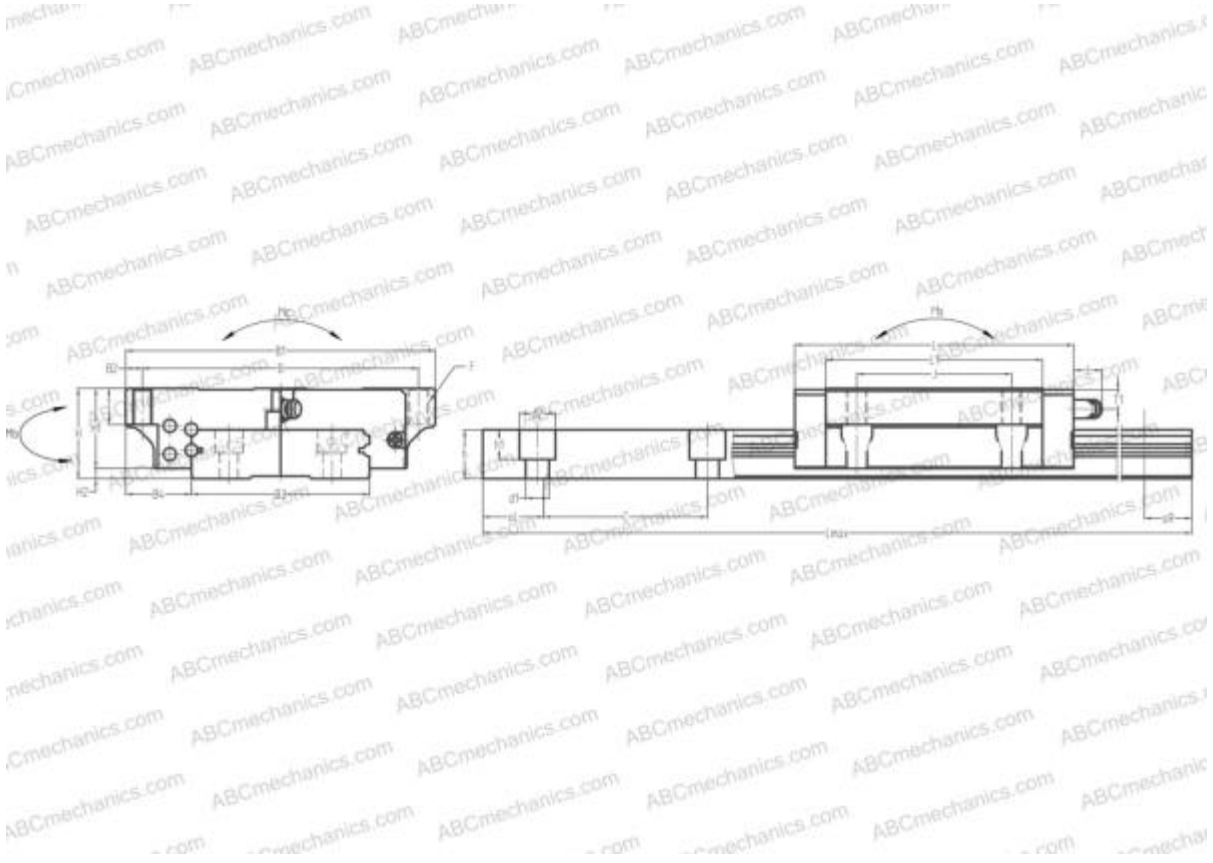

Technical specification



DIMENSIONS, MM

B1	60,000
H	17,000
L	51,400
B	53,000
J	26,000
L1	35,000
B2	3,500
B3	33,000
B4	13,500
H1	14,500
H2	2,500
T	6,000
T1	4,000
f	3,000
C	40,000

DIMENSIONS, MM

d1	4,500
d2	7,500
h	8,700
h1	5,300
L max	1000,000
aL	15,000
aR	15,000
F	M4x0.7x6

WEIGHT

Slide weight	0,200
Rail weight	2,100

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	LW17EL
THK	HRW17CA

INTERCHANGE

IKO	LWFF33
-----	------------------------

CALCULATION DATA

Basic dynamic load rating, C	4,200 kN
Basic static load rating, Co	9,100 kN
Static permissible moment, Ma	0,036 kN-m
Static permissible moment, Mb	0,033 kN-m
Static permissible moment, Mc	0,114 kN-m

INCLUDED PRODUCTS

LAW17EL

