


LY35BL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, Four directional iso-load carrying type, High rigidity type, Square type, Low, Ball slide length - long, Mounting tap

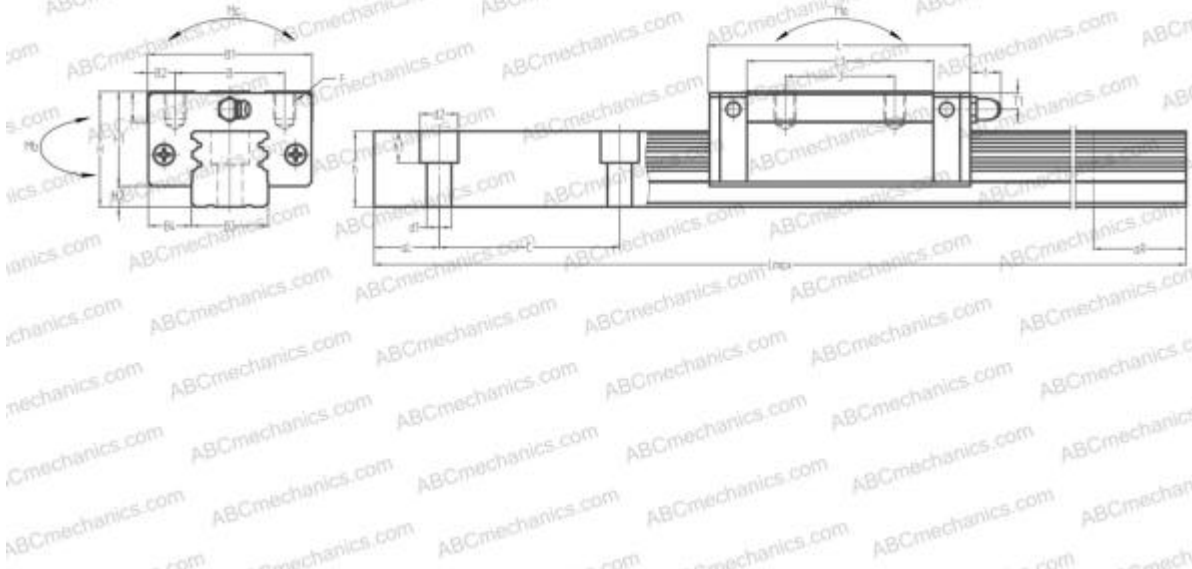

Technical specification

DIMENSIONS, MM

B1	70,000
H	48,000
L	133,400
B	50,000
J	72,000
L1	103,000
B2	10,000
B3	34,000
B4	18,000
H1	40,500
H2	7,500
T	12,000
T1	8,000
f	11,000
C	80,000

DIMENSIONS, MM

d1	9,000
d2	14,000
h	31,000
h1	12,000
L max	3000,000
aL	20,000
aR	20,000
F	M8x1.25x12

WEIGHT

Slide weight	1,600
Rail weight	7,900

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	LY35BL
STAR	1623-3

CALCULATION DATA

Basic dynamic load rating, C	42,500 kN
Basic static load rating, Co	67,000 kN
Static permissible moment, Ma	0,940 kN-m
Static permissible moment, Mb	0,940 kN-m
Static permissible moment, Mc	0,920 kN-m