


LY45BL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, Four directional iso-load carrying type, High rigidity type, Square type, Low, Ball slide length - long, Mounting tap

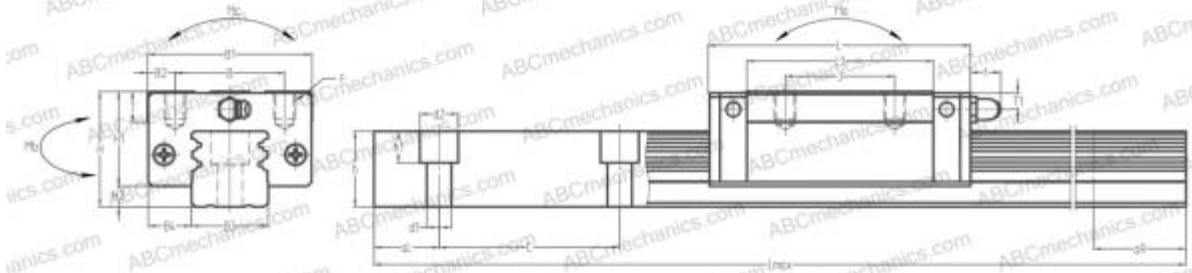

Technical specification

DIMENSIONS, MM

B1	86,000
H	60,000
L	169,000
B	60,000
J	80,000
L1	134,000
B2	13,000
B3	45,000
B4	20,500
H1	50,000
H2	10,000
T	13,000
T1	10,000
f	13,000
C	105,000

DIMENSIONS, MM

d1	14,000
d2	20,000
h	37,500
h1	17,000
L max	3000,000
aL	22,500
aR	22,500
F	M10x1.5x16

WEIGHT

Slide weight	3,200
Rail weight	12,700

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	LY45BL
STAR	1623-4

CALCULATION DATA

Basic dynamic load rating, C	63,500 kN
Basic static load rating, Co	104,000 kN
Static permissible moment, Ma	1,880 kN-m
Static permissible moment, Mb	1,880 kN-m
Static permissible moment, Mc	1,830 kN-m