


LA35EL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, Four directional iso-load carrying type, Super rigid type, Flanged type, Low, Ball slide length - standard, Mounting tap

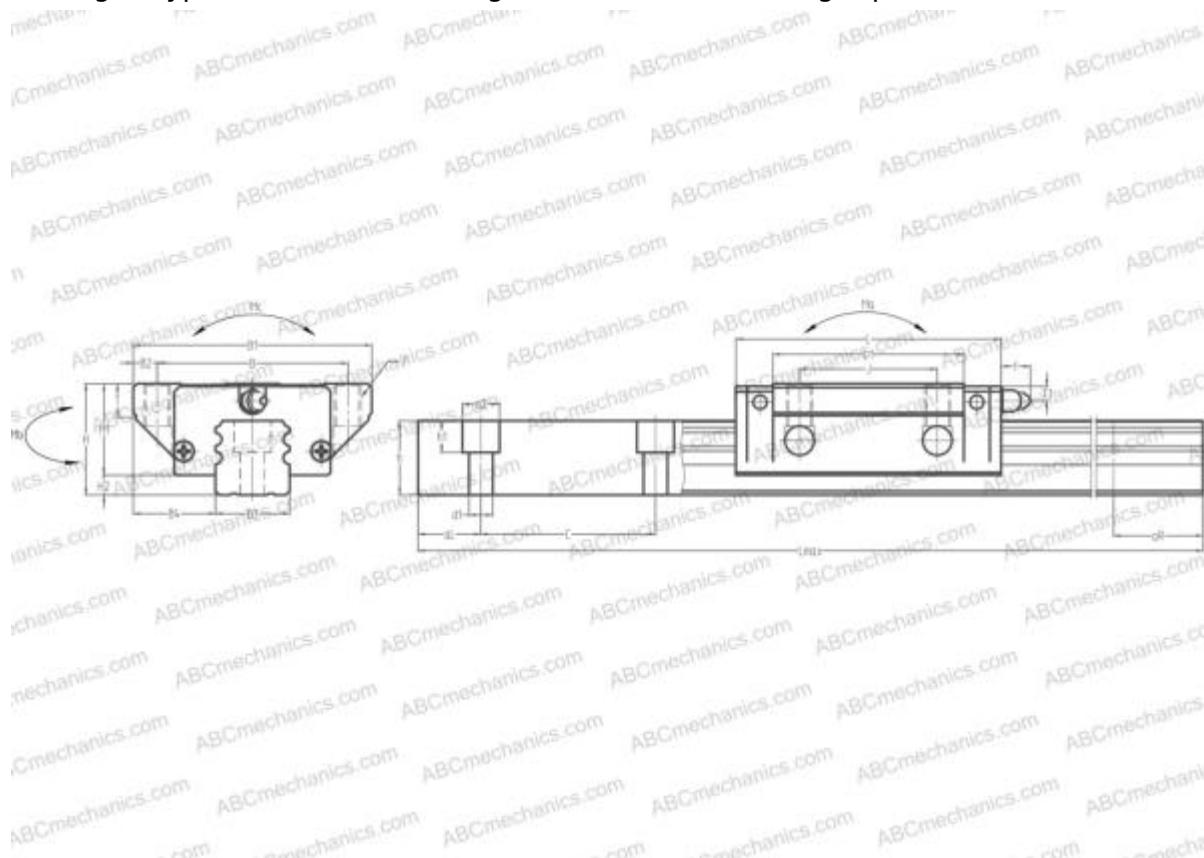

Technical specification

DIMENSIONS, MM

B1	100,000
H	48,000
L	110,600
B	82,000
J	62,000
L1	80,000
B2	9,000
B3	34,000
B4	33,000
H1	40,500
H2	7,500
T	12,000
T1	8,000
f	11,000
C	80,000

DIMENSIONS, MM

d1	9,000
d2	14,000
h	30,800
h1	12,000
L max	4000,000
aL	20,000
aR	20,000
F	M10x1.5x15

WEIGHT

Slide weight	1,900
Rail weight	7,700

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	LA35EL
IKO	LRX35

INTERCHANGE

STAR	1851-3
------	------------------------

CALCULATION DATA

Basic dynamic load rating, C	49,400 kN
Basic static load rating, Co	82,800 kN
Static permissible moment, Ma	0,920 kN-m
Static permissible moment, Mb	0,920 kN-m
Static permissible moment, Mc	1,070 kN-m