


LA65GL NSK

Linear guides

TYPE: Monorail guidance systems, Recirculating balls, Four directional iso-load carrying type, Super rigid type, Flanged type, Low, Ball slide length - long, Mounting tap

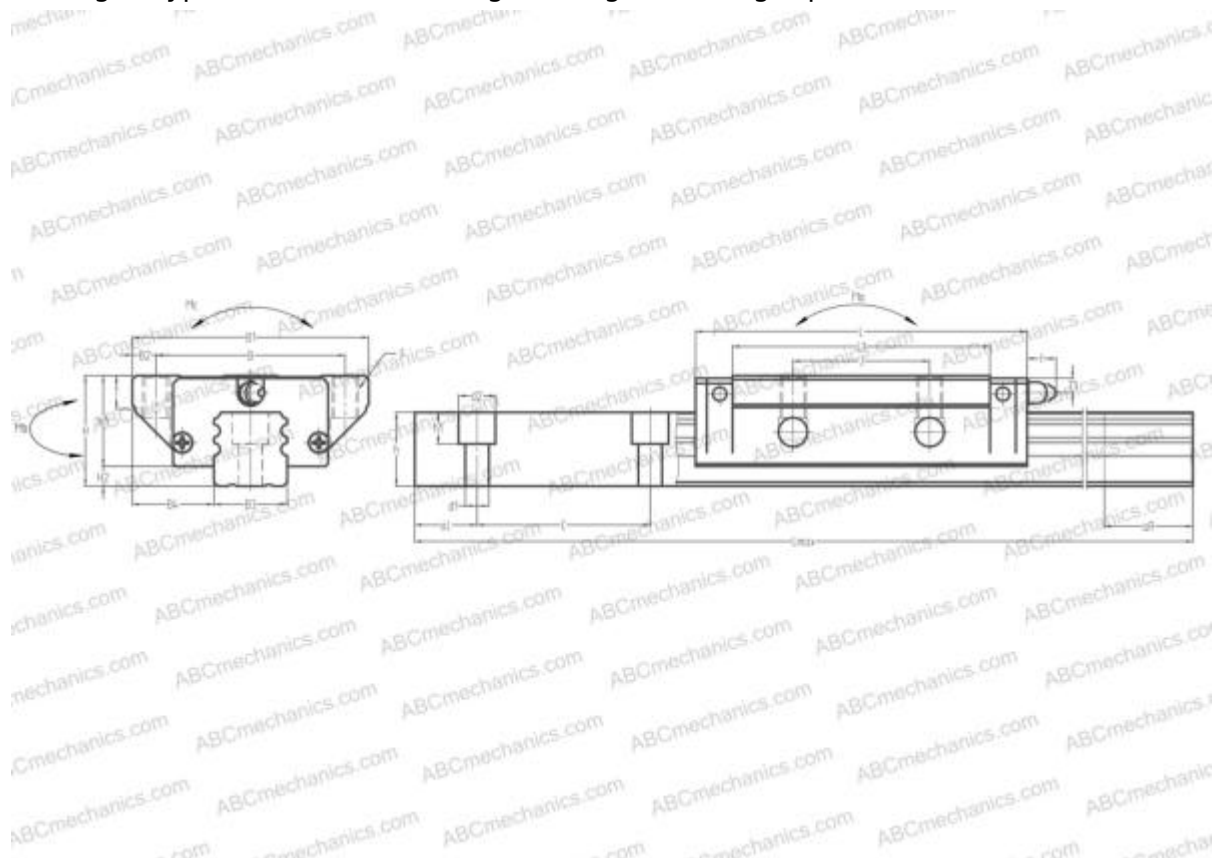

Technical specification

DIMENSIONS, MM

B1	170,000
H	90,000
L	256,200
B	142,000
J	110,000
L1	207,000
B2	14,000
B3	63,000
B4	53,500
H1	76,000
H2	14,000
T	22,000
T1	19,000
f	13,000
C	150,000

DIMENSIONS, MM

d1	18,000
d2	26,000
h	55,000
h1	22,000
L max	3900,000
aL	35,000
aR	35,000
F	M16x2x24

WEIGHT

Slide weight	15,500
Rail weight	25,900

MANUFACTURER

[NSK](#)

INTERCHANGE

ABC	LA65GL
THK	SRG65LC

INTERCHANGE

IKO	LRXG65
STAR	1853-6

CALCULATION DATA

Basic dynamic load rating, C	275,000 kN
Basic static load rating, Co	475,000 kN
Static permissible moment, Ma	13,600 kN-m
Static permissible moment, Mb	13,600 kN-m
Static permissible moment, Mc	11,800 kN-m